


# Bow-Tie™ Locking Cotter

The new Bow-Tie Locking Cotter pin works like a Hairpin Cotter, but locks itself on! Push or pull cotter leg into hole, Bow-Tie snaps into a zero-tension locked position. It is easily released by lifting loop and sliding off, but reduces the risk of being accidentally knocked or vibrated off, as with Hairpin Cotters. Made from MB Spring Wire with an attractive zinc plated finish. Use in any hole location to ensure secure fastening.



To install, push or pull Bow-Tie™ into hole.	Bow-Tie™ snaps into a zero-tension locked position!	You can even flip the Bow-Tie™ over the end-it stays locked!	Pull locking loop up and over to release.

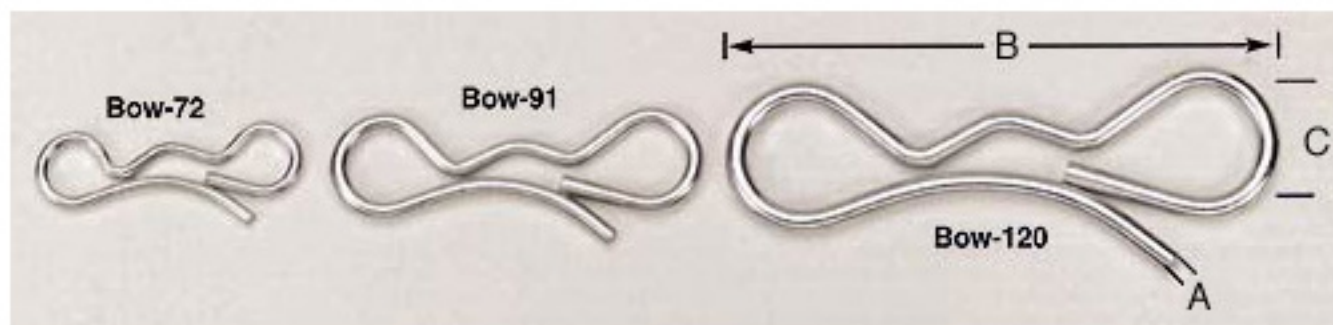

Bow Ties - Zinc Plated						
Stock Code	Use On Shaft Size	Dimensions			Minimum Hole Dia.	Weight/Lbs. Per 100 Pcs.
		A Wire Diameter	B Overall Length	C I.D. of Loop		
BOW-72	1/4	0.072	1-3/8	0.25	0.094	0.41
	5/16				0.094	
BOW-91	5/16	0.091	1-7/8	0.375	0.109	0.92
	3/8				0.125	
BOW-120	7/16	0.12	2-3/4	0.562	0.141	2.22
	1/2				0.156	
BOW-120-10	5/8	0.12	2-3/4	0.562	0.156	2.22
BOW-148-10	5/8	0.148	3-37/64	0.687	0.203	3.67
BOW-120-12	3/4	0.12	2-3/4	0.562	0.156	2.22
BOW-148-12	3/4	0.148	3-37/64	0.687	0.203	4.14
BOW-177-16	1	0.177	4-37/64	0.875	0.218	6.69
*Unless otherwise noted, all dimensions are for reference only.*						