


Door Holders

Rubber Door Holder Series



No. 1-666-2

- Simple positive door holder.
- Good shock absorbing qualities give near silent operation.
- Male portion is molded from black polypropylene.
- Whole unit provides corrosion-free performance.
- Choice of gentle or stronger pull off.
- Available with tapped hole in base for easier use on production line.

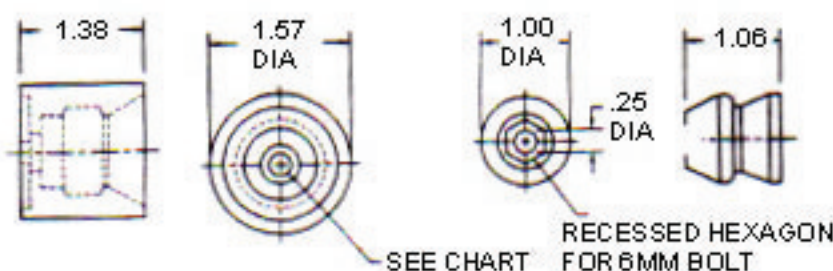

*Part No.	Styrene-Butadiene (SBR) Shore "A"	Color	Washer Hole	Min. Load (lb.)	Typical Load (lb.)	Usable Temp. Range °C/°F
1-666-2	75-85	Black	.25 Dia.	44 lb.	55 lb.	-60°/-76° to +85°/185°
1-774-2	50-55	Black	.25 Dia.	6.6 lb.	22 lb.	-20°/-4° to +100°/212°
1-775-2	50-55	Black	Tapped 6MM	6.6 lb.	22 lb.	-20°/-4° to +100°/212°
1-776-2	35-45	Blue	.25 Dia.	6.6 lb.	17 lb.	-25°/-13° to +50°/122°
1-777-2	75-85	Black	Tapped 6MM	44 lb.	55 lb.	-60°/-76° to +85°/185°
1-778-2	35-45	Blue	Tapped 6MM	6.6 lb.	17 lb.	-25°/-13° to +50°/122°

*Note: includes both female base and male stem.



Australia

www.conceptlatch.com.au

Melbourne:

Concept Latch, Lock & Hinge Pty Ltd
 22a Trade Park Drive,
 Tullamarine, Victoria,
 Australia. 3043
 Tel: (+613) 9335 1822
 Fax: (+613) 9310 5363
 Email: sales@conceptlatch.com.au