

Rue™ Rings

Patent No. 4,592,689

A Pivot Point Exclusive. Revolutionary Rue Ring Cutters surround the shaft. Automatic lock makes this one of the safest cutters available today. Best used in light to medium applications. Rue Ring cutters install fast without tools.




Additional feature is the manual secondary lock which tensions the Rue Ring tight and dampens vibration.

Made of hard drawn MB spring wire, zinc plated or stainless type 302. Easy to install - easy to remove.


HOLE PLACEMENT END SHAFT USE ONLY

Rue Ring Cutters will retro fit most standard applications without design changes.

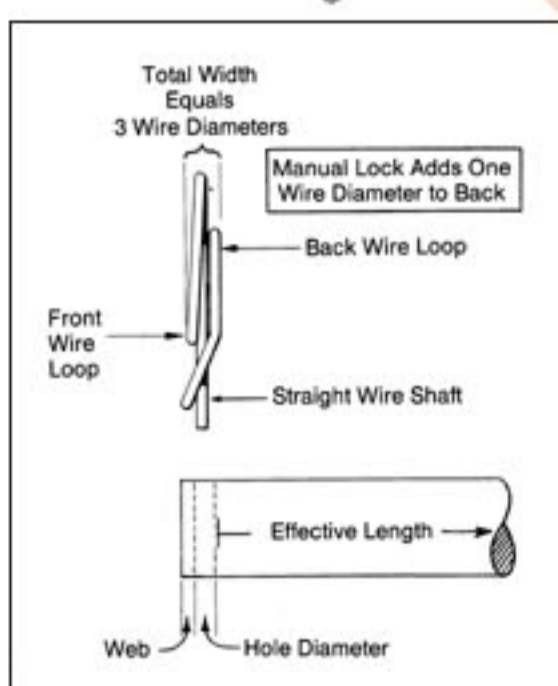

Total width of any Rue Ring equals 3 of its wire diameters. The straight wire shaft which goes through the pin hole is one, plus two additional wire loops, one on each side, front and back.

Recommended hole size is 2 times the wire diameter of the selected Rue Ring. This leaves the Rue Ring short of interfering with effective shaft length.

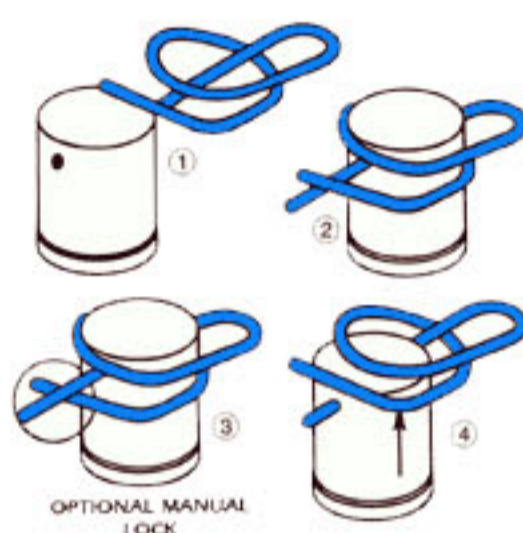

Recommended web thickness is a minimum of 1 wire diameter and a maximum of 2 wire diameters. A thicker web results in more holding power but makes installation and removal more difficult.



Rue Rings Specs				
Stock Code	Fits Shaft Size	Dimensions		
		A	B	C
RUE-8	1/4	.267/.257	.041	.844
RUE-9H	1/4 Hvy	.270/.260	.054	.936
RUE-10	5/16	.330/.320	.047	1.044
RUE-14	3/8	.392/.382	.054	1.214
RUE-22	1/2	.520/.510	.062	1.420
RUE-24	1/2 Hvy	.520/.510	.072	1.456
RUE-30	5/8	.645/.635	.072	1.690
RUE-34	3/4	.770/.760	.080	2.081
RUE-36	3/4 Hvy	.770/.760	.091	2.166
RUE-40	7/8 Hvy	.895/.885	.105	2.506
RUE-42	1	1.020/1.010	.105	2.756

Rue Rings - Zinc Plated & Stainless Steel				
Stock Code	Sizes Stocked in Stainless	Size	Wire Diameter	Approx. Weight/Lbs. Per 100 Pcs.
RUE-8	RUE-8-S	1/4 HEAVY	.041	.11
RUE-9H		1/4 X-HEAVY	.054	.18
RUE-10	RUE-10-S	5/16 REGULAR	.047	.18
RUE-14	RUE-14-S	3/8 REGULAR	.054	.23
RUE-22		1/2 REGULAR	.062	.41
RUE-24	RUE-24-S	1/2 HEAVY	.072	.68
RUE-30	RUE-30-S	5/8 REGULAR	.072	.79
RUE-34		3/4 REGULAR	.080	1.00
RUE-36	RUE-36-S	3/4 HEAVY	.091	1.30
RUE-40		7/8 HEAVY	.105	2.06
RUE-42		1 REGULAR	.105	2.28