



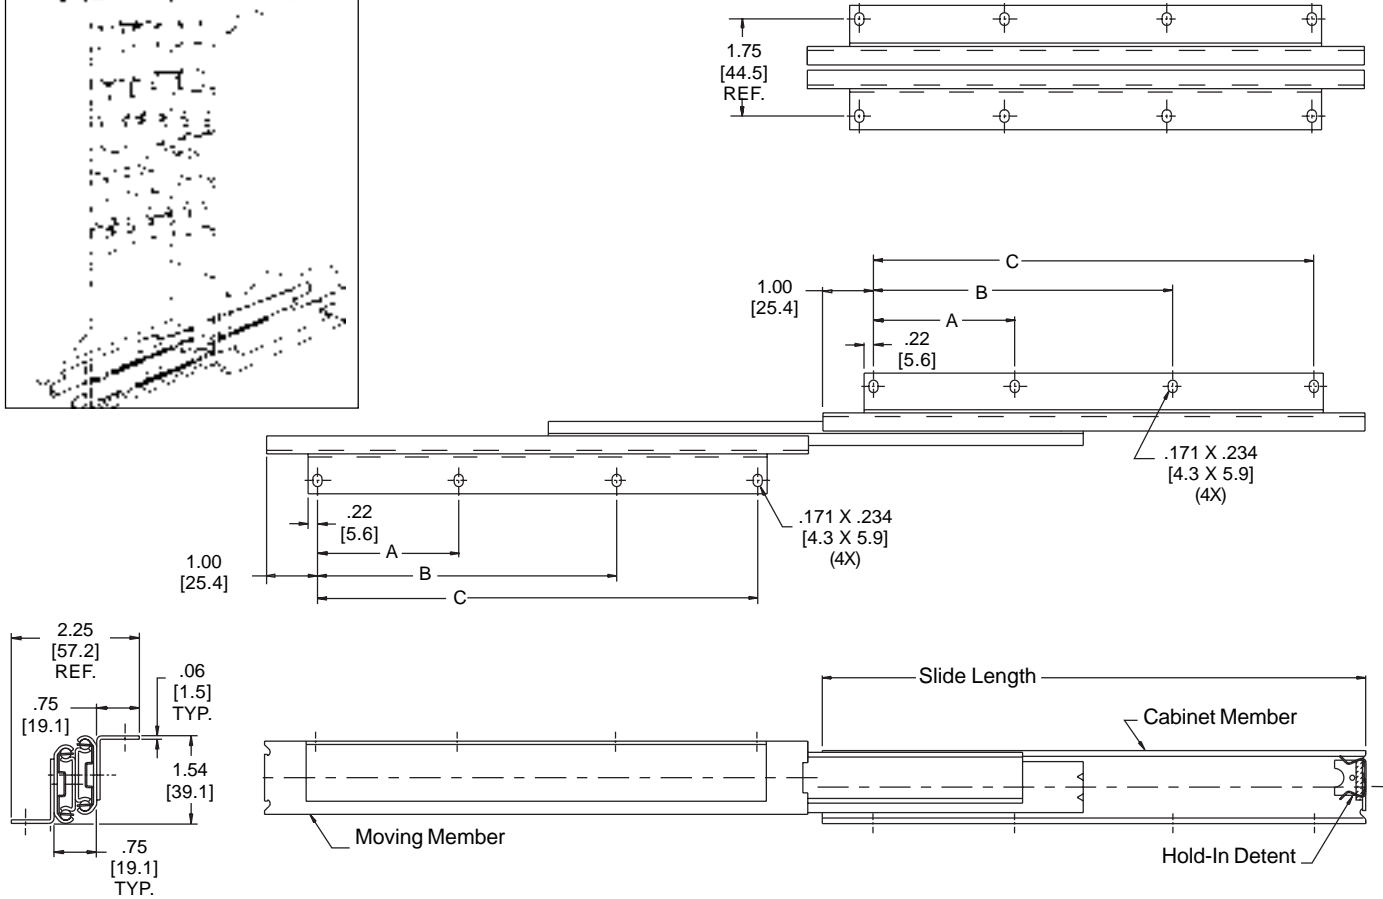

**APPLICATIONS:** Pull-out storage shelves, kitchen pull-out pantries, and entertainment centers.

**MODEL 301-2590**

Undermount Shelf Slide  
Non-Disconnect  
Over Travel  
130 lb. [59 kg.] Capacity

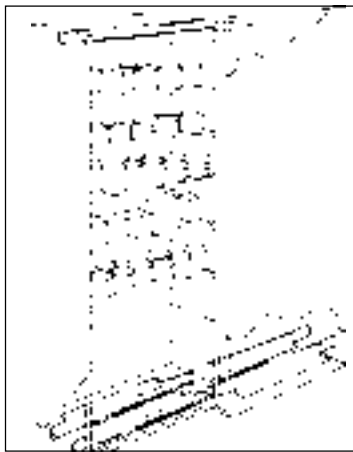

INCHES  
[mm]

- Finish** Bright electro-zinc (C) or black zinc\* (CB) plating
- Length** 12" to 28" [305mm to 711 mm]
- Height** 1.54" [39.1mm]
- Side Space** .75" [19.1mm] slide only  
2.25" [57.2mm] with brackets
- Load** 130 lbs. [59 kg.] per pair\*\*
- Travel** Slide length plus .83" [21.1mm]
- Mounting** Bracket/undermount
- Hardware** #8 pan head or round head screws
- Features** Hold-in detent, silenced open and closed, slide is handed

\* Minimum order quantities may apply.  
\*\* Load rating based on an 18" slide on a 16" wide shelf cycled 50,000 times.

Part Number	Slide Length	Slide Travel	A	B	C
301-2590-12	12.00 [305]	12.83 [325.9]	4.00 [101.6]	6.00 [152.4]	10.00 [254.0]
301-2590-14	14.00 [356]	14.83 [376.7]	4.00 [101.6]	8.00 [203.2]	12.00 [304.8]
301-2590-16	16.00 [406]	16.83 [427.5]	4.00 [101.6]	10.00 [254.0]	14.00 [355.6]
301-2590-18	18.00 [457]	18.83 [478.3]	4.00 [101.6]	12.00 [304.8]	16.00 [406.4]
301-2590-20	20.00 [508]	20.83 [529.1]	7.00 [177.8]	11.00 [279.4]	18.00 [457.2]
301-2590-22	22.00 [559]	22.83 [579.9]	7.00 [177.8]	13.00 [330.2]	20.00 [508.0]
301-2590-24	24.00 [610]	24.83 [630.7]	7.00 [177.8]	15.00 [381.0]	22.00 [558.8]
301-2590-26	26.00 [660]	26.83 [681.5]	7.00 [177.8]	17.00 [431.8]	24.00 [609.6]
301-2590-28	28.00 [711]	28.83 [732.3]	7.00 [177.8]	19.00 [482.6]	26.00 [660.4]

## Installation Instructions

1. Mark a line at least 1/4" [6.4mm] in from the right side of the cabinet opening and parallel to the cabinet side.
2. Locate a point on this line 1.00" [25.4mm] back from the desired front of the slide.
3. Using #8 pan or round head screws, mount the cabinet member bracket through the first hole at this point.

**NOTE: For maximum strength, ensure that the hold-in detent spring is installed inside the cabinet.**

4. Mount the left hand slide similarly, locating the screw centerline of the cabinet member bracket at least 1/4" [6.4mm] in from the left side of the opening.
5. Keeping the right and left hand slides parallel, install the remainder of the cabinet member screws.

**NOTE: When using soft materials such as particle board, replace rear cabinet mounting screws with through bolts.**

6. With slides extended, center the shelf and drive the screws up through the moving member brackets into the bottom of the shelf.

**NOTE: If the unit is mounted too close to the floor, reverse the procedure above and install the moving member screws first.**

## Slide Ordering Instructions

Complete your slide order for Accuride model 301-2590 by specifying the following:

Total Required Slides \_\_\_\_\_ 20 Pair C 301-2590 -16 D  
Slide Finish \_\_\_\_\_  
Slide Model Number \_\_\_\_\_  
Slide Length \_\_\_\_\_  
Optional Polybag Packaging \_\_\_\_\_

## Packaging

**Distributor (D) Pack:** All lengths are packaged 5 pair per box. Polybag includes one pair of slides and mounting screws.

**Bulk (P) Pack:** Slides only. Left hand slides and right hand slides are packaged in separate boxes.

Lengths 12" - 18"      20 each per box  
Lengths 20" - 28"      10 each per box

## Specifications

Slide members and ball retainers: Cold rolled steel  
Ball bearings: Carburized steel

**Note:** Specifications, materials, prices, terms, and delivery are subject to change without notice.

# Accuride

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue  
Santa Fe Springs, CA 90670

TEL (562) 903-0200

FAX (562) 903-0208

www.accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom