628-ABPKSH2

NO	CHANGE	ENG.NO.	DATE
	RELEASED, REF M7762	EN5129	01/09/04
1	REVISED TO DETAIL	EN5198	05/20/05
2	ADDED " FREE WHEELING BUTTON" IN TITLE BLOCK	EN5200	6/3/05
3	DIMENSIONS RESCALED	EN5344	3/21/08
4	STRICKER DETAIL CHANGED TO MATCH 628-SS9	EN5532	12/9/11

ALL COMPONENTS TO BE PACKED IN A SECURE POLY BAG



SUPPLIED WITH ONE LOCK WASHER



SUPPLIED WITH ONE 1"-20 THREAD NUT



SUPPLIED WITH ONE NEOPRENE GASKET

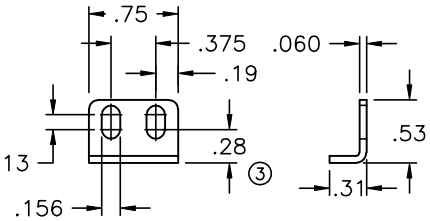

SUPPLIED WITH ONE STAINLESS STRIKER

OVER MOLDED KEY
QUANTITY 2

FOR ADDITIONAL KEYS ORDER
EX: PART# 7__-14901-30 (MB)

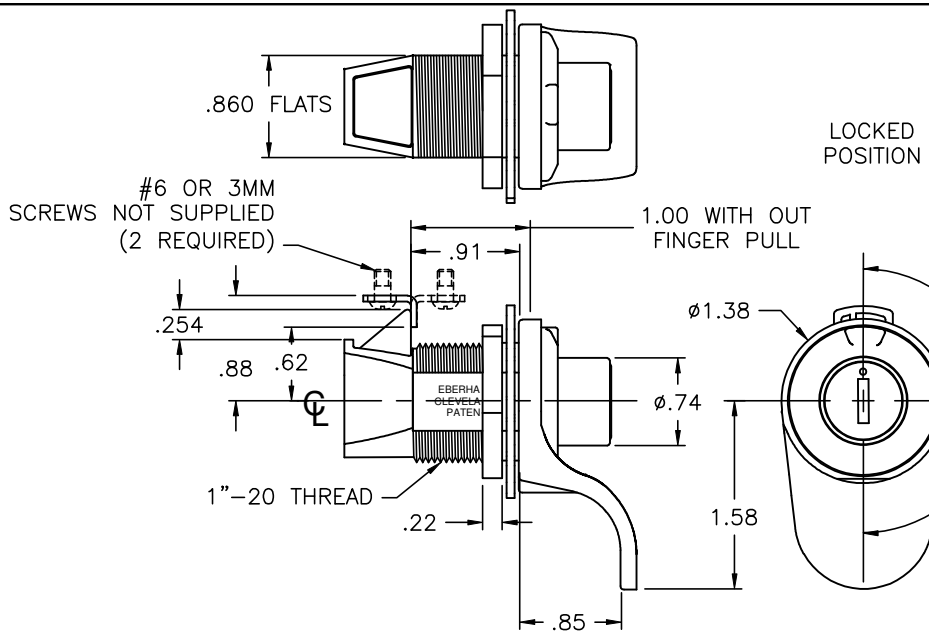

LOCKED POSITION





SUGGESTED CUTOUT

MAXIMUM SUGGESTED DOOR THICKNESS .500"

ORDER (EXAMPLE)

PART# 700-628-PK-MB

KEYS AVAILABLE:
H700D-H750D

628-PK



628-APK
FOR VERTICAL FINGER PULL
SHOWN

9 O'CLOCK POSITION 3 O'CLOCK POSITION

628-BPK
FOR HORIZONTAL FINGER PULL

CUSTOMER PRINT
SHEET 1 OF 2
628-APK SHOWN
PATENT PENDING

FINISH: (MB) MOLDED BLACK

EBERHARD MANUFACTURING CO.
DIVISION OF
THE EASTERN COMPANY
CLEVELAND, OHIO 44149-9712

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:	
ANGLES:	±2°
2 PLACE DEC.:	±.03
3 PLACE DEC.:	±.015
ALL HOLES:	±.005

DATE	12-16-03
DR.BY	SSK
SCALE	1:1
CHK.BY	

NAME: PUSH BUTTON
FREE WHEELING BUTTON IN LOCKED POSITION

MATERIAL: BLACK PLASTIC

PART NUMBER: 628-PK CHART