


> H1C075

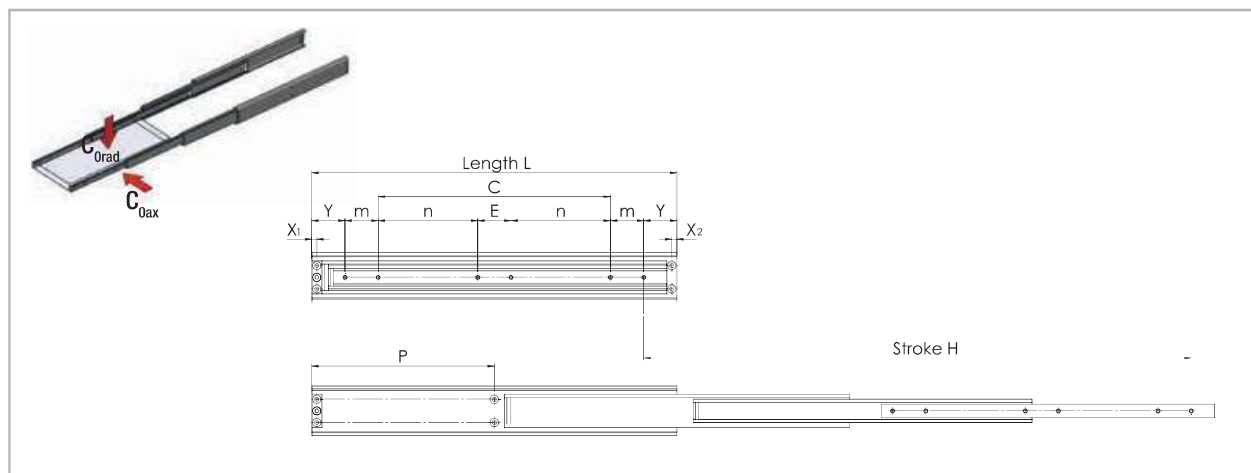

All dimensions are indicated in mm


Fig. 35

Type	Size	Length L [mm]	Stroke H [mm]	Load capacity per pair C_{Orad} [N]	X1	X2	Y	m	n	E	C	P	Number of holes
H1C	75	300	450	1200	7.5	7.5	50	50	-	50	100	-	4
		350	525	1250							150		
		400	600	1300							200		
		450	675	1350							250		
		500	750	1300							300		
		550	825	1200					150		-	275	6
		600	900	1150					175			300	
		650	975	1100					200			325	
		700	1050	1050					225			350	
		750	1125	1000					250			325	
		800	1200	950					275			400	
		850	1275	900					300			425	
		900	1350	850					325			450	
		950	1425	800					350			475	
		1000	1500	750					375			500	
		1100	1650	650					425			550	
		1200	1800	550					475			600	
		1300	1950	450					525			650	
		1400	2100	350					575			700	
		1500	2250	200					625			750	

Tab. 10

>

H1C075

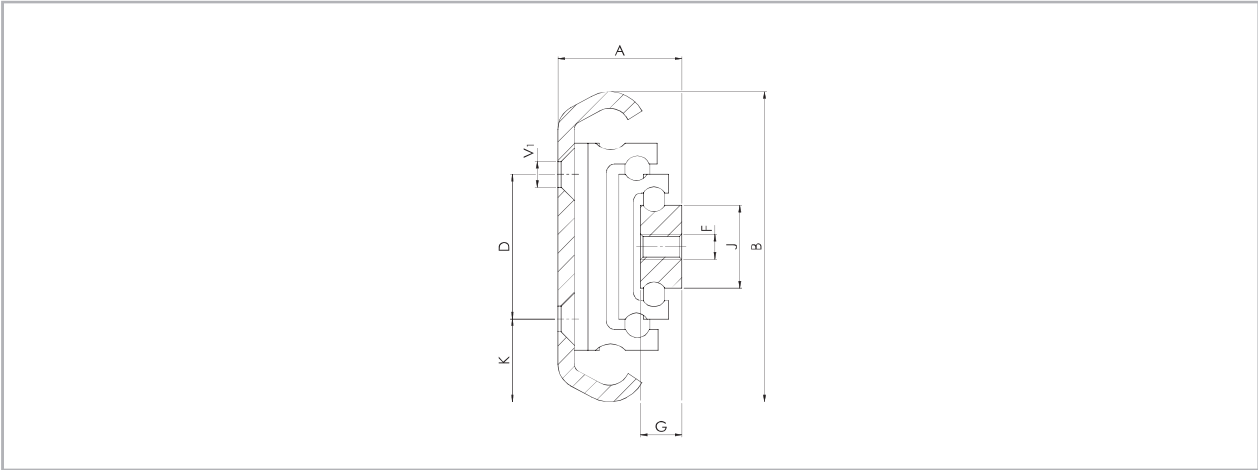

All dimensions are indicated in mm
V1 Mounting holes (V) for countersunk screws according to DIN 7991/ISO 10642

Fig. 36

Type	Size	A	B	J	G	K	D	F	V1	Weight per single guide [kg/m]
H1C	75	30	75	20	10	20	35	M6	M6	8.60

Tab. 11