

ADJUSTABLE SOFT-DOWN STAY



NSD-10



■ Features


- For downward-opening flap doors.
- Can be used with concealed, piano, or butt hinges.
- Designed to hold the door in closed position.
- Successfully passed for the 50,000 open/close private cycle test.
- Opening speed adjustable.
- Torque Calculation :

Torque = Door Height x 1/2 x Door Weight.

Per Piece : 20~70 kgf-cm.


Per Pair : 40~140 kgf-cm.

| Material | Finish |
|-------------------|---------------|
| Zinc Alloy, Steel | Bright Nickel |

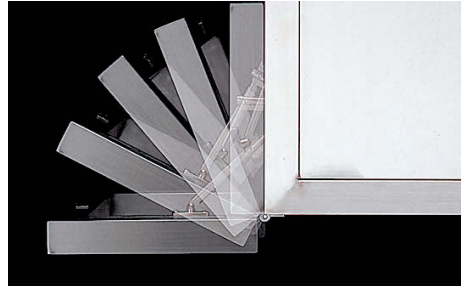


LID SUPPORTS

ADJUSTABLE SOFT-DOWN STAY

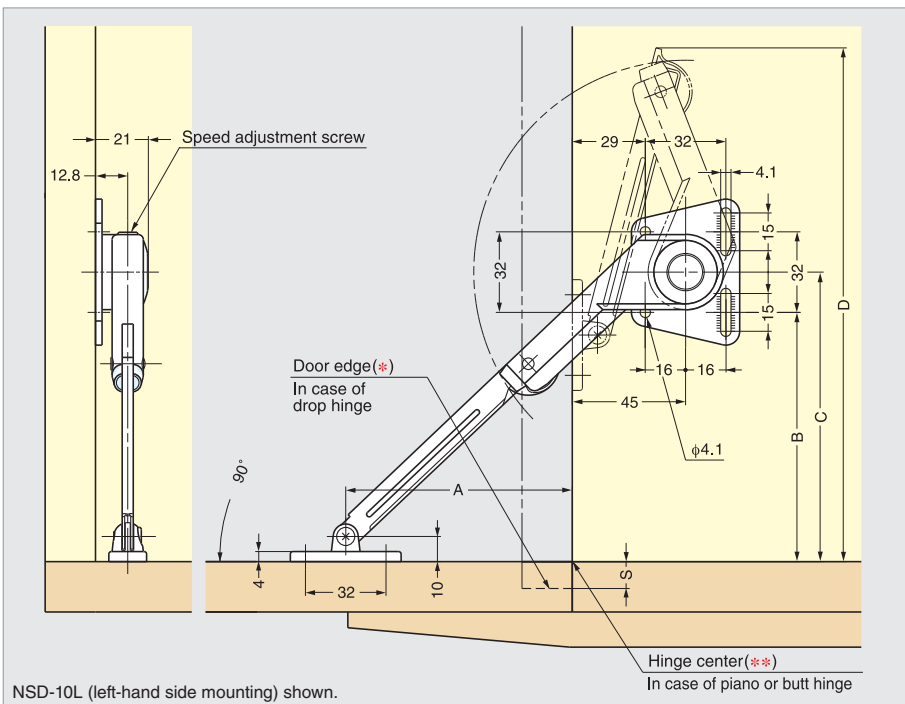

NSD-10L (left-hand side mounting) shown.

The distance for A, B, C is measured from "door edge (*)" and "top surface of bottom board" when drop hinges are used, and from "hinge center (**)" and "top surface of bottom board" when piano or butt hinges are used.

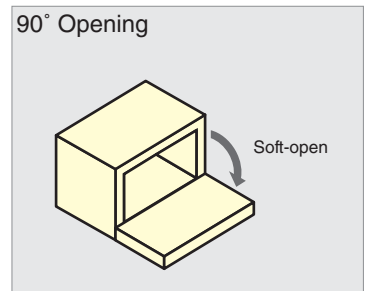

| Hinge Type | A | B | C | D |
|--------------------|----|-------|-------|-------|
| Drop Hinge | 97 | 106-S | 122-S | 211-S |
| Piano / Butt Hinge | 90 | 99 | 115 | 204 |

Note: S = Overlay

| Item Code | Item Name | Weight | Box | Carton |
|-------------|-----------|--------|--------|--------|
| 180-109-376 | NSD-10R | 210 g | 20 pcs | 80 pcs |
| 180-109-381 | NSD-10L | 210 g | 20 pcs | 80 pcs |