




M Series Castor Wheels – Bolt Hole

- Up to 150kg load rating per castor
- Strong pressed steel construction
- Zinc plate finish
- Total lock option available
- Four wheel types
- Common Uses: Food preparation areas, Light factory equipment, Hospital equipment, Warehouse trolleys, Shop fitting, Cabinet making

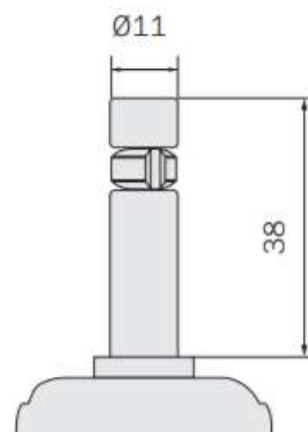

GRIP NECK



GRIP NECK TOTAL LOCK



BPB

- » Resilient blue rubber tread
- » Polypropylene centre
- » Precision bearings



NNI

- » Virgin nylon 6 tread
- » Nylon centre
- » Plain bore and POM bushing



TPB

- » Thermoplastic elastomer tread
- » Polypropylene centre
- » Precision bearings



UPB

- » Polyurethane tread
- » Polypropylene centre
- » Precision bearings



MOUNTING TYPE

WHEEL DIAMETER (mm)	MOUNTING TYPE	FRAME CODE	WHEEL ABR	MAX LOAD (KG)	WHEEL ABR	MAX LOAD (KG)	WHEEL ABR	MAX LOAD (KG)	WHEEL ABR	MAX LOAD (KG)	OVERALL HEIGHT (mm)	SWIVEL RADIUS (mm)
100 125		MZ4G10032 MZ4G12532	-BPB	100 110	-NNI	140 150	-TPB	100 110	-UPB	100 110	135 158	78 96
100 125		MZ4GT10032 MZ4GT12532	-BPB	100 110	-NNI	140 150	-TPB	100 110	-UPB	100 110	135 158	114

WHEELS

WHEEL DIAMETER (mm)	TREAD WIDTH (mm)	WHEEL CODE	MAX LOAD (KG)	BORE DIAMETER (no spacer mm)	BORE DIAMETER (spacer mm)	HUB LENGTH (mm)	TREAD MATERIAL	CENTRE MATERIAL	BEARING TYPE	AXLE SPACER TYPE
75 100 125	32	BP07532B BP10032B BP12532B	80 100 110	8	-	38	BLUE HI RES	PP	PRECISION BEARINGS	
75 100 125	32	NN07532I NN10032I NN12532I	130 140 150	15	8	38	NYLON	NYLON	PLAIN BORE	
75 100 125 150	32	TP07532B TP10032B TP12532B TP15032B	80 100 110 150	8	-	38	THERMOPLASTIC ELASTOMER	PP	PRECISION BEARINGS	-
75 100 125 150	32	UP07532B UP10032B UP12532B UP15032B	80 100 110 125	8	-	38	URETHANE	PP	PRECISION BEARINGS	-

ACCESSORY



GRIP NECK SOCKET

PRODUCT CODE	DESCRIPTION
SOCKET-11-38-1	11mm ID x 38mm LONG