

N6 Hinge

Surface mount · 304 or 316 Stainless Steel



- Stamped hinge construction
- High gloss finish option
- Covered hinge option

Material and Finish

Stainless Steel, passivated or high gloss

Performance Details

Radial load:

Max. static load: 534 N (120 lbf) Axial load:

Max. static load: 534 N (120 lbf)

Installation Notes

Screws not supplied Install hinge with M4 (8-32) CSK

For optional covers:

Order covers separately.


Clean hinge leaf surface to remove dirt, oil or grease.

Remove backing from pre-applied adhesive. Place cover over leaf. Press firmly to activate adhesive.

Part Number


Order hinge and optional covers separately


Style 1 (Part Number see table)




Recommended mounting holes: tapped M4 (8-32) thread or [1.02] $\emptyset 4.5 \pm 0.1 (.177 \pm .004)$ thru All hinges 20 [.79] door/frame center line


Style 2 (Part Number see table)







Style 3 (Part Number see table)







	rart number				
	304 Stainless Steel, Passivated	316 Stainless Steel, High Gloss			
Style	Hinge	Hinge	Small Leaf Cover	Medium Leaf Cover	Large Leaf Cover
1	N6-4E-422-20	N6-4E-422-24	N6-C-42-24 (2 each)	_	_
2	N6-4E-424-20	N6-4E-424-24	N6-C-42-24	N6-C-44-24	_
3	N6-4E-426-20	N6-4E-426-24	N6-C-42-24	_	N6-C-46-24
4	N6-4E-444-20	N6-4E-444-24	_	N6-C-44-24 (2 each)	_
5	N6-4E-446-20	N6-4E-446-24	_	N6-C-44-24	N6-C-46-24
6	N6-4E-466-20	N6-4E-466-24	_	_	N6-C-46-24 (2 each)



ww.southco.com/N6





N6 Hinge

Surface mount · 304 or 316 Stainless Steel





Style 4 (Part Number see table)







Style 5 (Part Number see table)





Style 6 (Part Number see table)

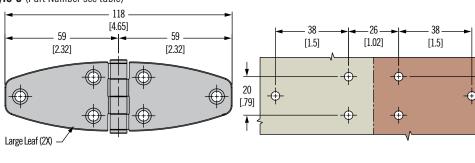





Optional covers ordered separately

For use with small leaf: part number N6-C-42-24









10 [39]

