



P8 Grab Handle

Surface mount


- Two styles and color options available
- Concealed installation
- Four standard lengths

Material and Finish

Aluminum, anodized, clear or black

Performance Details

Maximum working load: 1500 N (335 lbf)



Installation Notes


Screws not supplied.
 Calculate screw length using the following formula:
 Door thickness + 5 (.20)
 Maximum tightening torque of mounting screws: 1.7 N·m (15 in·lbf)

Part Number Selection

For visual identification:
 M4 products have a counterbored hole.
 8-32 products have a countersunk hole

Part Number

Oval profile handles are currently offered in a 10-32 thread only.

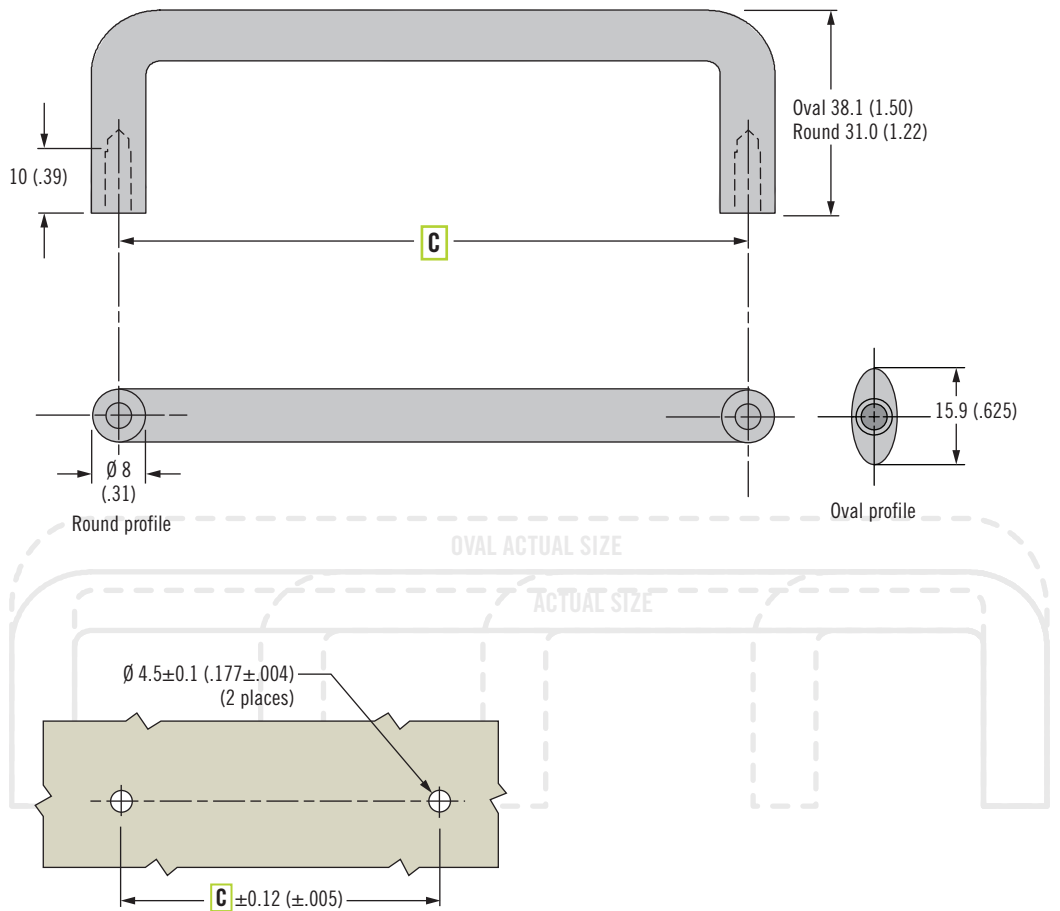

Round Profile

P8 - C - 31 - T - 1 F - P

- C** Centers
030 30 (1.18) Hole centers
064 64 (2.52) Hole centers
096 96 (3.78) Hole centers
128 128 (5.04) Hole centers

- T** Tapped mounting hole
08 Imperial 8-32
M4 Metric M4 x 0.7

- P** Packing option
 Omit for individual packaging (1 per bag)
3 Layer packaging contact Southco

- F** Finish
1 Clear anodized
5 Black anodized

Oval Profile

Finish	Part Number		C
	Bulk Packaged	Individually Packaged (1 per bag)	
Clear anodized	P8-128-38-10V-11-3	P8-128-38-10V-11	128 (5.04)
Black anodized	P8-128-38-10V-15-3	P8-128-38-10V-15	

Other options available. For complete details on variety, part numbers, installation and specification, go to



www.southco.com/P8

Dimensions in millimeters (inch) unless otherwise stated