




## Typical Applications:

- Automotive Underbody Shields
- Engine Covers
- Access Panels



## Rapier Quarter-Turn Fasteners

Rapier offers one of the most comprehensive ranges of quick release, quarter-turn fasteners in the industry. They provide a practical, low-cost fastening solution, particularly for high-volume users. Southco supplies a Rapier solution for the smallest to the most rugged application. Available as 3.5 mm, 5 mm, 7 mm and 9 mm studs, with a range of receptacles that include a Front Mount receptacle suitable for thermoplastic materials. Rapier is the first choice for many of the world's leading manufacturers.


### Rapier Assembly

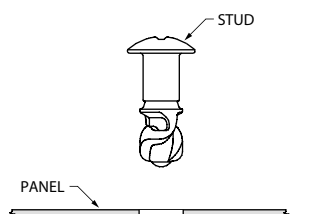

Rapier fastener components consist of a spiral-cam stud, an optional stud retainer (not shown) and a receptacle (clip-on shown).

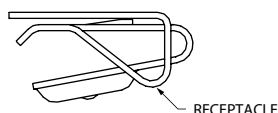

Rapier receptacles typically snap-in or clip onto the support panel.

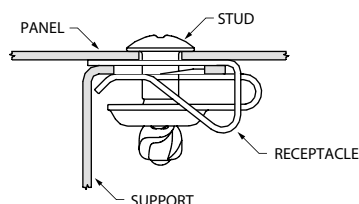

### Rapier Assemblies

- Easy Quarter-turn fastening
- Positive stop
- Vibration resistant detent

## Rapier Line Selection Process

### Step 1 – Select Receptacle Style

Choice of a Rapier receptacle is a balance of load handling requirements and installation method. Select a preferred mounting style from those shown at right. Each style is not available in all sizes, so Step 2 is important.

### Step 2 – Select Receptacle Size

Use the Rapier Performance Chart to select the receptacle size that best meets your performance requirements.

### Step 3 – Select Stud Style

Rapier studs are shown following the receptacle pages in each size section. Performance is the same for each stud, so selection is based on head style. The length of the stud is determined by calculating Total Material Thickness (TMT) as defined on the receptacle pages.


### Step 4 – Select an Optional Retainer

Choose either a plastic or metal retainer if you desire the stud to remain in the panel when disengaged from the receptacle.

### Receptacle Styles




Clip-On



Long Reach Clip-On



Right Angle Bracket



Thick Panel Clip-On



Snap-In



Front Load Clip-In



Press-in Insert



Rivet Plate



Weld Plate

**Clip-On** – Clip-onto edge of support panel.

**Long Reach Clip-On** – Allows stud holes to be placed farther from edge of panel.

**Right Angle Bracket** – Used on support panels perpendicular to stud panel.

**Thick Panel Clip-On** – Used on support panels up to 5.5mm (Rapier 7mm only).

**Snap in** – Clip-into a prepared hole anywhere in the support panel.

**Front Load Clip-In** – Clip into a prepared hole anywhere in the support panel (9mm only).

**Press-in Insert** – Suitable for soft metals and thermoplastics. Press or ultrasonic installation.

**Rivet Plate** – Rivet mount onto support panel.

**Weld Plate** – Weld mount onto support panel.

### Rapier Performance Chart

Stud Size	Receptacle Style	Receptacle Strength <sup>1</sup>	Max. Total Material Thickness (TMT) <sup>2</sup>
3.5 mm	Mini Clip-On	27 lbs.	2.5 to 26.4 mm
5 mm	Mini Clip-On	31 lbs.	2.5 to 25.4 mm
	Long Reach Clip-On	31 lbs.	2.5 to 25.4 mm
	Front Load Clip-In	14 lbs.	2.5 to 25.4 mm
	Press-in Insert	—	0.5 to 27.4 mm
7 mm	Mini Clip-On	45 lbs.	2.5 to 25.4 mm
	Long Reach Clip-On	50 lbs.	1.5 to 28.4 mm
	Right Angle Bracket	50 lbs.	1.5 to 28.4 mm
	Thick Panel Clip-On	50 lbs.	3.5 to 30.4 mm
	Front Load Clip-In	32 lbs.	2.5 to 25.4 mm
	Press-in Insert	—	0.5 to 27.4 mm
9 mm	Clip-On	61 lbs.	2.0 to 28.9 mm
	Right Angle Bracket	61 lbs.	2.0 to 28.9 mm
	Front Load Clip-In	23 lbs.	2.5 to 17.4 mm
	Rivet Plate	65 lbs.	2.0 to 28.9 mm
	Weld Plate	65 lbs.	2.0 to 28.9 mm

#### Notes:

1. Maximum load without distortion.

2. See specific receptacle page for TMT specification.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Stud & Retainer 3.5 mm

**DZUS®**  
QUICK ACCESS

## Stud



<b>Part Number</b>	D2-513-7(L)-190
--------------------	-----------------

## Standard Material & Finish:

**Material:** Case hardened steel

**Finish:** Zinc plate, chromate

## Rapier Stud Part Numbers:



# D2-513-7(L)-190

Basic Part No. #1 Phillips Recess

Finish – **90** = Zinc Plate, Chromate

Material (Steel)

Stud Length No. – Determined on Receptacle selection pages

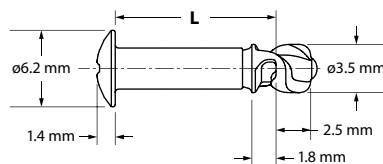

## Additional Stud Dimensions:


**L Dimension** - The stud length (L) depends on the type of receptacle chosen and the thickness of your materials. Use the table provided with each type of receptacle to determine the stud length needed for your application.

**Note:** Add 1mm to TMT when using a plastic retainer.

## Plastic Retainer



<b>Part Number</b>	D2-523-100-040
--------------------	----------------

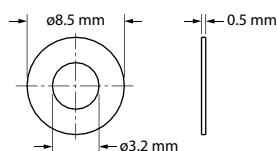

## Standard Material & Finish:

**Material:** High density polyethylene

**Finish:** Natural color

All dimensions on this page are in millimeters.


# DZUS® Rapier® D2 Quarter-Turn Receptacle Mini Clip-On - 3.5 mm

**DZUS®**  
QUICK ACCESS




Mini Clip-On


**Part Number** D2-533-300-190

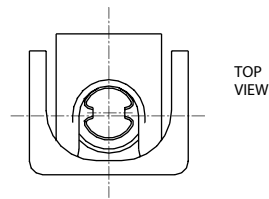

TOP  
VIEW

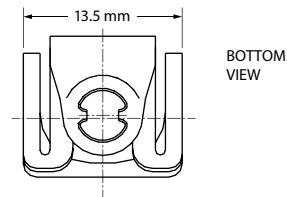

BOTTOM  
VIEW

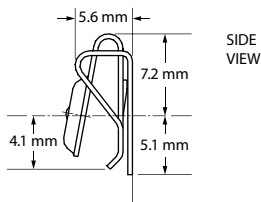

SIDE  
VIEW

## Material & Finish

**Material:** Spring steel

**Finish:** Zinc plate and chromate

## Mechanical

**Maximum Load without Distortion:** 27 lbs.

**Maximum Torque:** 13.3 lbs.-in.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

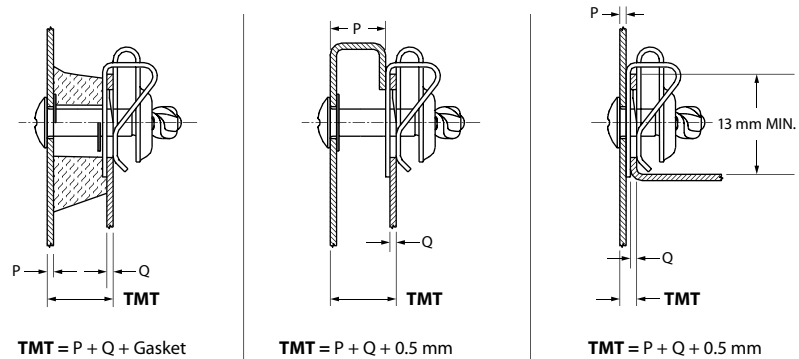


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	07
3.5 to 4.4 mm	08
4.5 to 5.4 mm	09
5.5 to 6.4 mm	10
6.5 to 7.4 mm	11
7.5 to 8.4 mm	12
8.5 to 9.4 mm	13
9.5 to 10.4 mm	14
10.5 to 11.4 mm	15
11.5 to 12.4 mm	16
12.5 to 13.4 mm	17
13.5 to 14.4 mm	18
14.5 to 15.4 mm	19
15.5 to 16.4 mm	20
16.5 to 17.4 mm	21
17.5 to 18.4 mm	22
18.5 to 19.4 mm	23
19.5 to 20.4 mm	24
20.5 to 21.4 mm	25
21.5 to 22.4 mm	26
22.5 to 23.4 mm	27
23.5 to 24.4 mm	28
24.5 to 25.4 mm	29
25.5 to 26.4 mm	30

## Example:

When TMT = 24 mm;  
Stud Length No. is **28**;  
Stud Part Number is  
**D2-513-728-190**  
for a Phillips recess #1 stud.



## Note:

1. Equals (L) Dim on Stud Selection pages.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.

Stud

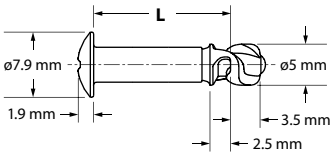

Additional Stud Dimensions:

**L Dimension** - The stud length (L) depends on the type of receptacle chosen and the thickness of your materials. Use the table provided with each type of receptacle to determine the stud length needed for your application.

Material & Finish:



**Material:** Case hardened steel  
**Finish:** Zinc plate, chromate

Rapier Stud Part Numbers:

**D2-515-7(L)-190**

Basic Part Number  
Finish – **90** = Zinc Plate w/ Chromate  
Material (Case Hardened Steel)  
Stud Length No. – Determined on Receptacle selection pages

Optional Stud (Washer Head)

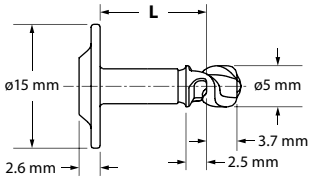

Part Number	D2-515-13(L)-190
-------------	------------------

For minimum orders of 5,000 pieces

Standard Material & Finish:

**Material:** Case hardened steel  
**Finish:** Zinc plate, chromate

Retainers

Plastic	Steel
 <b>D2-525-100-040</b>	 <b>D2-525-101-190</b>

Material & Finish:

**Plastic Retainer:** High density polyethylene, natural  
**Steel Retainer:** Spring steel, zinc plate, chromate

All dimensions on this page are in millimeters.


# DZUS® Rapier® D2 Quarter-Turn Receptacle Mini Clip-On – 5 mm

**DZUS®**  
QUICK ACCESS




Mini Clip-On


**Part Number** D2-535-330-190

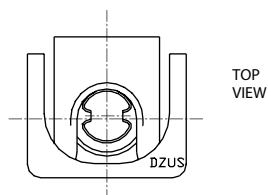

TOP  
VIEW

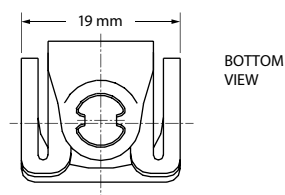

BOTTOM  
VIEW

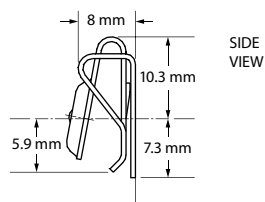

SIDE  
VIEW

## Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate, chromate

## Mechanical

**Maximum Load without Distortion:** 31 lbs.  
**Maximum Torque:** 22 lbs.-in.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

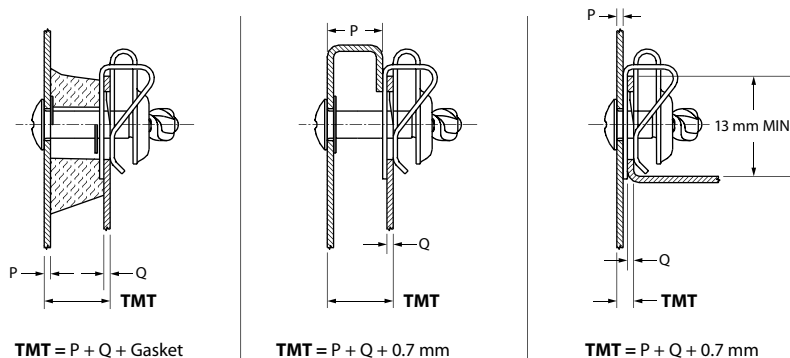


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	09
3.5 to 4.4 mm	10
4.5 to 5.4 mm	11
5.5 to 6.4 mm	12
6.5 to 7.4 mm	13
7.5 to 8.4 mm	14
8.5 to 9.4 mm	15
9.5 to 10.4 mm	16
10.5 to 11.4 mm	17
11.5 to 12.4 mm	18
12.5 to 13.4 mm	19
13.5 to 14.4 mm	20
14.5 to 15.4 mm	21
15.5 to 16.4 mm	22
16.5 to 17.4 mm	23
17.5 to 18.4 mm	24
18.5 to 19.4 mm	25
19.5 to 20.4 mm	26
20.5 to 21.4 mm	27
21.5 to 22.4 mm	28
22.5 to 23.4 mm	29
23.5 to 24.4 mm	30
24.5 to 25.4 mm	31

## Example:

When TMT = 24 mm;  
Stud Length Number is **30**;  
Stud Part Number is **D2-515-730-190** for  
a Phillips recess #2 stud.

## Note:

1. Equals (L) Dim on Stud Selection pages.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.


# DZUS® Rapier® D2 Quarter-Turn Receptacle

## Long Reach Clip-On – 5 mm



**Part Number** D2-535-340-130\*

\* For minimum orders of 5,000 pieces

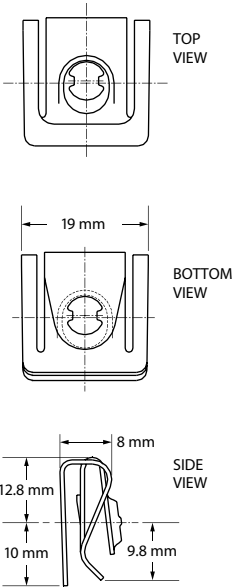

### Material & Finish

**Material:** Spring steel  
**Finish:** Organic silver

### Mechanical

**Installation Load:** 31 lbs.  
**Maximum Torque:** 22 lbs.-in.

### To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

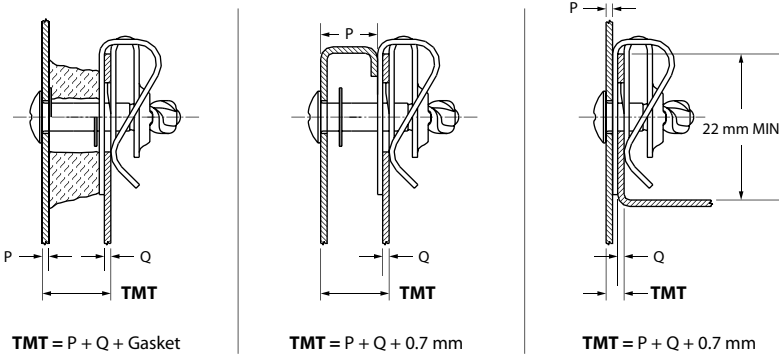


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	09
3.5 to 4.4 mm	10
4.5 to 5.4 mm	11
5.5 to 6.4 mm	12
6.5 to 7.4 mm	13
7.5 to 8.4 mm	14
8.5 to 9.4 mm	15
9.5 to 10.4 mm	16
10.5 to 11.4 mm	17
11.5 to 12.4 mm	18
12.5 to 13.4 mm	19
13.5 to 14.4 mm	20
14.5 to 15.4 mm	21
15.5 to 16.4 mm	22
16.5 to 17.4 mm	23
17.5 to 18.4 mm	24
18.5 to 19.4 mm	25
19.5 to 20.4 mm	26
20.5 to 21.4 mm	27
21.5 to 22.4 mm	28
22.5 to 23.4 mm	29
23.5 to 24.4 mm	30
24.5 to 25.4 mm	31

**Note:**  
 1. Equals (L) Dim on Stud Selection pages.

**Example:**  
 When TMT = 24 mm;  
 Stud Length Number is **30**;  
 Stud Part Number is **D2-515-730-190** for a Phillips recess #2 stud.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.




# DZUS® Rapier® D2 Quarter-Turn Receptacle Snap-In – 5 mm


**DZUS®**  
QUICK ACCESS



Snap-In



TOP VIEW



SIDE VIEW

Support Thickness Ranges	Snap-In Part Numbers	H Dim.
0.9 to 1.4 mm	D2-535-600-190	1.9 mm
1.5 to 2.0 mm	D2-535-601-190	2.5 mm

## Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate, chromate

## Mechanical

**Maximum Load without Distortion:** 14 lbs.  
**Maximum Torque:** 22 lbs.-in.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

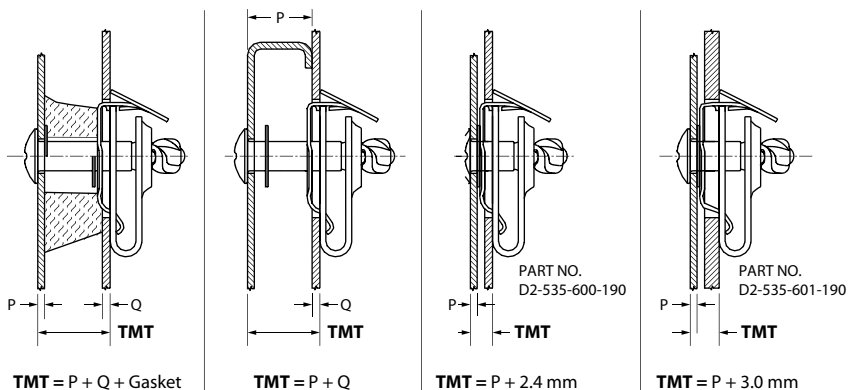


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	09
3.5 to 4.4 mm	10
4.5 to 5.4 mm	11
5.5 to 6.4 mm	12
6.5 to 7.4 mm	13
7.5 to 8.4 mm	14
8.5 to 9.4 mm	15
9.5 to 10.4 mm	16
10.5 to 11.4 mm	17
11.5 to 12.4 mm	18
12.5 to 13.4 mm	19
13.5 to 14.4 mm	20
14.5 to 15.4 mm	21
15.5 to 16.4 mm	22
16.5 to 17.4 mm	23
17.5 to 18.4 mm	24
18.5 to 19.4 mm	25
19.5 to 20.4 mm	26
20.5 to 21.4 mm	27
21.5 to 22.4 mm	28
22.5 to 23.4 mm	29
23.5 to 24.4 mm	30
24.5 to 25.4 mm	31

### Note:

1. Equals (L) Dim on Stud Selection pages.

### Example:

When TMT = 24 mm;  
Stud Length Number is **30**;  
Stud Part Number is **D2-515-730-190** for a Phillips recess #2 stud.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.



DZUS® Rapier® D2 Quarter-Turn Receptacle  
Press-In Insert – 5 mm




Press-In Insert

Part Number D2-535-100-969



TOP  
VIEW

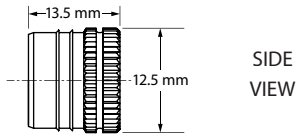

SIDE  
VIEW

Material

Brass and plated steel

Mechanical

Installation Load: 2250 lbs. min.

To Determine Stud Length Needed

- 1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
- 2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

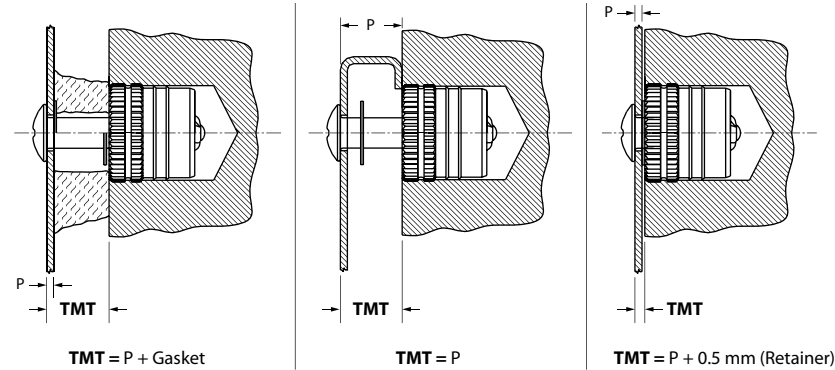


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
0.5 to 1.4 mm	11
1.5 to 2.4 mm	12
2.5 to 3.4 mm	13
3.5 to 4.4 mm	14
4.5 to 5.4 mm	15
5.5 to 6.4 mm	16
6.5 to 7.4 mm	17
7.5 to 8.4 mm	18
8.5 to 9.4 mm	19
9.5 to 10.4 mm	20
10.5 to 11.4 mm	21
11.5 to 12.4 mm	22
12.5 to 13.4 mm	23
13.5 to 14.4 mm	24
14.5 to 15.4 mm	25
15.5 to 16.4 mm	26
16.5 to 17.4 mm	27
17.5 to 18.4 mm	28
18.5 to 19.4 mm	29
19.5 to 20.4 mm	30
20.5 to 21.4 mm	31
21.5 to 22.4 mm	32
22.5 to 23.4 mm	33
23.5 to 24.4 mm	34
24.5 to 25.4 mm	35
25.5 to 26.4 mm	36
26.5 to 27.4 mm	37

**Example:**  
When TMT = 24 mm;  
Stud Length Number is **34**;  
Stud Part Number is **D2-515-734-190** for  
a Phillips recess #2 stud.

**Note:**  
1. Equals (L) Dim on Stud Selection pages.



All dimensions on this page are in millimeters.

Additional installation information is  
located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Stud & Retainer 7 mm

**DZUS®**  
QUICK ACCESS

## Stud

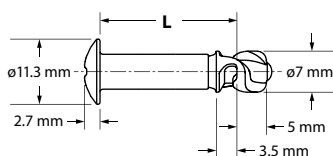

## Additional Stud Dimensions:


**L Dimension** - The stud length (L) depends on the type of receptacle chosen and the thickness of your materials. Use the table provided with each type of receptacle to determine the stud length needed for your application.

## Material & Finish:

**Material:** Case hardened steel  
**Finish:** Zinc plate and chromate

## Rapier Stud Part Numbers:

# D2-517-7(L)-190

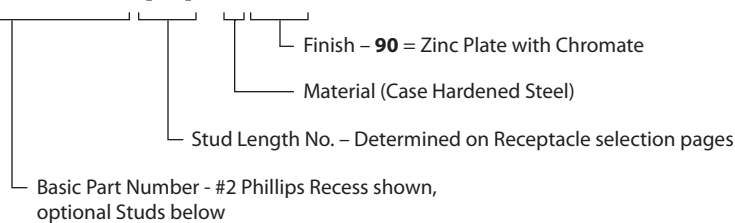

## Optional Studs

Slotted	Phillips Recess #3	Wing	Bail
<p>D2-517-11(L)-190</p>	<p>D2-517-13(L)-190</p>	<p>D2-517-14(L)-190</p>	<p>D2-517-4(L)-190</p>

For minimum orders of 5,000 pieces

## Retainers

Plastic	Steel
<p>D2-527-100-040</p>	<p>D2-527-101-190</p>


## Material & Finish:

**Plastic Retainer:** High density polyethylenene, natural  
**Steel Retainer:** Spring steel, zinc plate and chromate

All dimensions on this page are in millimeters.


# DZUS® Rapier® D2 Quarter-Turn Receptacle

## Mini Clip-On – 7 mm

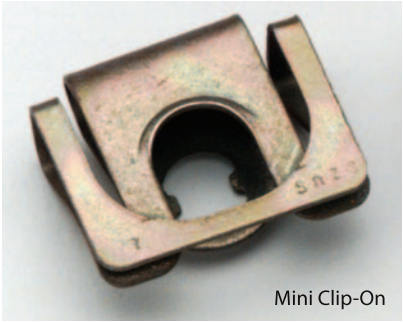

Part Number

D2-537-330-190

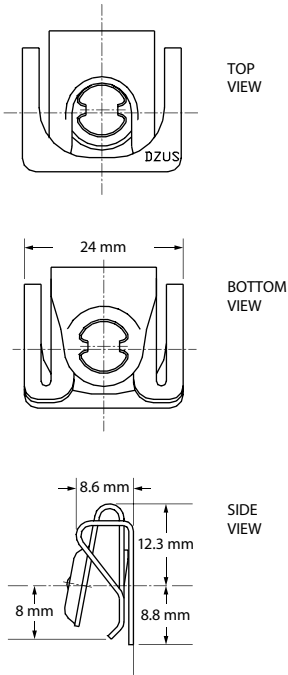

### Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate, chromate

### Mechanical

**Maximum Load without Distortion:** 45 lbs.  
**Maximum Torque:** 31 lbs.-in.

### To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

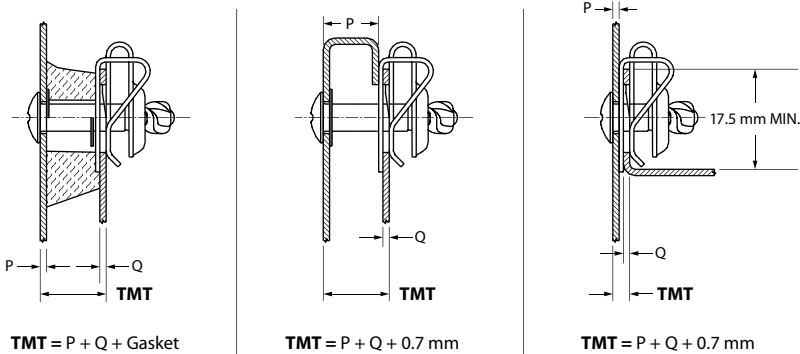


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	10
3.5 to 4.4 mm	11
4.5 to 5.4 mm	12
5.5 to 6.4 mm	13
6.5 to 7.4 mm	14
7.5 to 8.4 mm	15
8.5 to 9.4 mm	16
9.5 to 10.4 mm	17
10.5 to 11.4 mm	18
11.5 to 12.4 mm	19
12.5 to 13.4 mm	20
13.5 to 14.4 mm	21
14.5 to 15.4 mm	22
15.5 to 16.4 mm	23
16.5 to 17.4 mm	24
17.5 to 18.4 mm	25
18.5 to 19.4 mm	26
19.5 to 20.4 mm	27
20.5 to 21.4 mm	28
21.5 to 22.4 mm	29
22.5 to 23.4 mm	30
23.5 to 24.4 mm	31
24.5 to 25.4 mm	32

**Note:**  
 1. Equals (L) Dim on Stud Selection pages.

**Example:**  
 When TMT = 24 mm;  
 Stud Length Number is **31**;  
 Stud Part Number is **D2-517-731-190** for a Phillips recess #2 stud.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Receptacle Long Reach Clip-On & Right Angle Bracket – 7 mm


**DZUS®**  
QUICK ACCESS



Long Reach Clip-On

**Part Number** D2-537-300-130\*


\* For minimum orders of 10,000 pieces

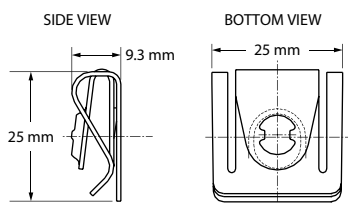

## Material & Finish


**Material:** Spring steel

**Finish:** Organic silver

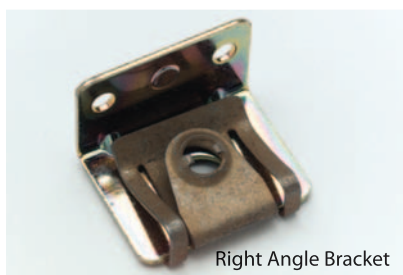

Right Angle Bracket

**Part Number** D2-537-310-130

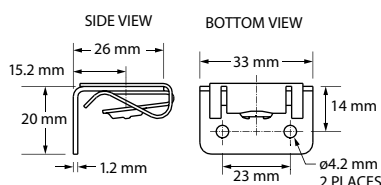

## Material & Finish - Bracket

**Material:** Steel

**Finish:** Zinc plate, chromate

## Material & Finish - Receptacle

**Material:** Spring steel

**Finish:** Organic silver

## Mechanical

### Installation Load

**without distortion:** 50 lbs.

**Maximum Torque:** 31 lbs.-in.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

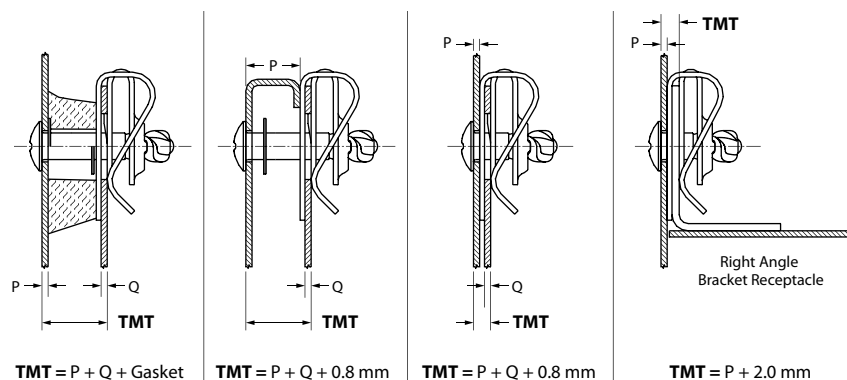


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
1.5 to 2.4 mm	09
2.5 to 3.4 mm	10
3.5 to 4.4 mm	11
4.5 to 5.4 mm	12
5.5 to 6.4 mm	13
6.5 to 7.4 mm	14
7.5 to 8.4 mm	15
8.5 to 9.4 mm	16
9.5 to 10.4 mm	17
10.5 to 11.4 mm	18
11.5 to 12.4 mm	19
12.5 to 13.4 mm	20
13.5 to 14.4 mm	21
14.5 to 15.4 mm	22
15.5 to 16.4 mm	23
16.5 to 17.4 mm	24
17.5 to 18.4 mm	25
18.5 to 19.4 mm	26
19.5 to 20.4 mm	27
20.5 to 21.4 mm	28
21.5 to 22.4 mm	29
22.5 to 23.4 mm	30
23.5 to 24.4 mm	31
24.5 to 25.4 mm	32
25.5 to 26.4 mm	33
26.5 to 27.4 mm	34
27.5 to 28.4 mm	35

### Example:

When TMT = 24 mm;  
Stud Length Number is **31**;  
Stud Part Number is **D2-517-731-190** for  
a Phillips recess #2 stud.

### Note:


1. Equals (L) Dim on Stud Selection pages.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Receptacle


## Thick Panel, Clip-On – 7 mm

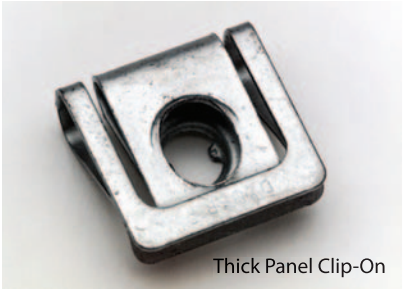

Part Number

D2-537-301-130\*

\* For minimum orders of 10,000 pieces

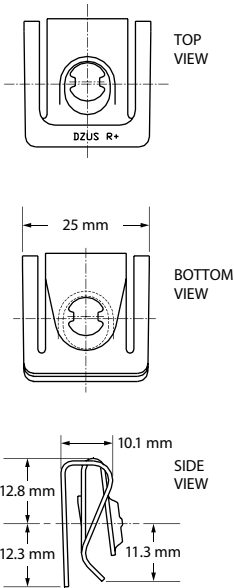

### Material & Finish

**Material:** Spring steel  
**Finish:** Organic silver

### Mechanical

**Maximum Load Without Distortion:** 50 lbs.  
**Maximum Torque:** 31 lbs.-in.

### To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

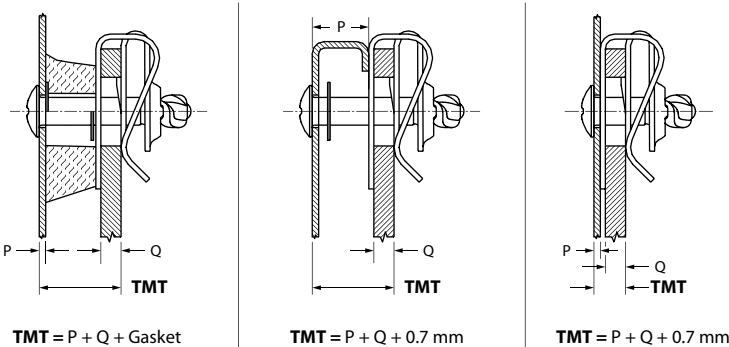


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
3.5 to 4.4 mm	11
4.5 to 5.4 mm	12
5.5 to 6.4 mm	13
6.5 to 7.4 mm	14
7.5 to 8.4 mm	15
8.5 to 9.4 mm	16
9.5 to 10.4 mm	17
10.5 to 11.4 mm	18
11.5 to 12.4 mm	19
12.5 to 13.4 mm	20
13.5 to 14.4 mm	21
14.5 to 15.4 mm	22
15.5 to 16.4 mm	23
16.5 to 17.4 mm	24
17.5 to 18.4 mm	25
18.5 to 19.4 mm	26
19.5 to 20.4 mm	27
20.5 to 21.4 mm	28
21.5 to 22.4 mm	29
22.5 to 23.4 mm	30
23.5 to 24.4 mm	31
24.5 to 25.4 mm	32
25.5 to 26.4 mm	33
26.5 to 27.4 mm	34
27.5 to 28.4 mm	35
28.5 to 29.4 mm	36
29.5 to 30.4 mm	37

**Note:**  
 1. Equals (L) Dim on Stud Selection pages.


**Example:**  
 When TMT = 24 mm;  
 Stud Length Number is **31**;  
 Stud Part Number is **D2-517-731-190** for a #2 Phillips recess stud.

All dimensions on this page are in millimeters.


Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Receptacle Snap-In – 7 mm


**DZUS®**  
QUICK ACCESS

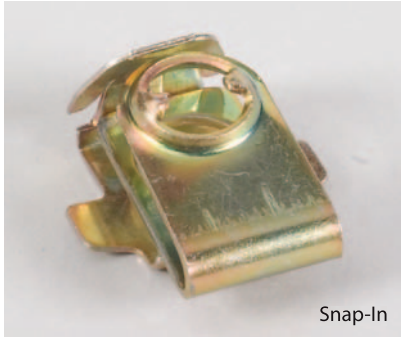

Snap-In



TOP VIEW



SIDE VIEW

Support Thickness Ranges	Snap-In Part Numbers	H Dim.
0.9 to 1.4 mm	D2-537-600-190	1.9 mm
1.5 to 2.0 mm	D2-537-601-190	2.5 mm

## Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate, chromate

## Mechanical

**Maximum Load without Distortion:** 32 lbs.  
**Maximum Torque:** 31 lbs.-in.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

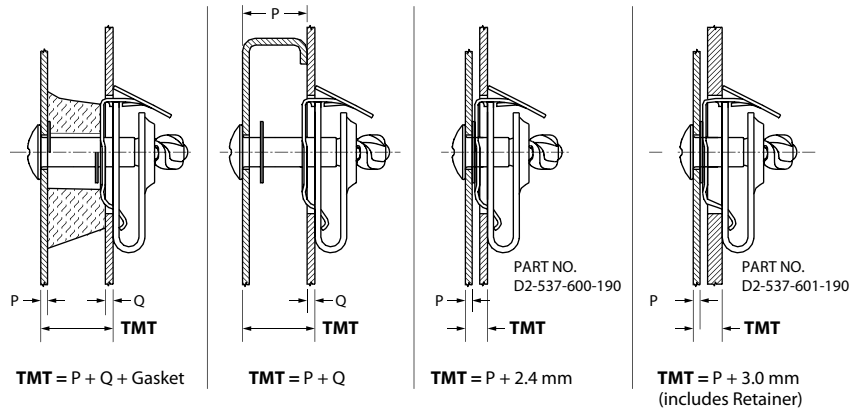


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	10
3.5 to 4.4 mm	11
4.5 to 5.4 mm	12
5.5 to 6.4 mm	13
6.5 to 7.4 mm	14
7.5 to 8.4 mm	15
8.5 to 9.4 mm	16
9.5 to 10.4 mm	17
10.5 to 11.4 mm	18
11.5 to 12.4 mm	19
12.5 to 13.4 mm	20
13.5 to 14.4 mm	21
14.5 to 15.4 mm	22
15.5 to 16.4 mm	23
16.5 to 17.4 mm	24
17.5 to 18.4 mm	25
18.5 to 19.4 mm	26
19.5 to 20.4 mm	27
20.5 to 21.4 mm	28
21.5 to 22.4 mm	29
22.5 to 23.4 mm	30
23.5 to 24.4 mm	31
24.5 to 25.4 mm	32

## Example:

When TMT = 24 mm;  
Stud Length Number is **31**;  
Stud Part Number is **D2-517-731-190** for a Phillips recess #2 stud.

## Note:

1. Equals (L) Dim on Stud Selection pages.

All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Receptacle Press-In – 7 mm



**DZUS®**  
QUICK ACCESS



Press-In Insert

**Part Number**

D2-537-100-969



## Material

Brass and plated steel

## Mechanical

**Installation Load:** 2250 lbs.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

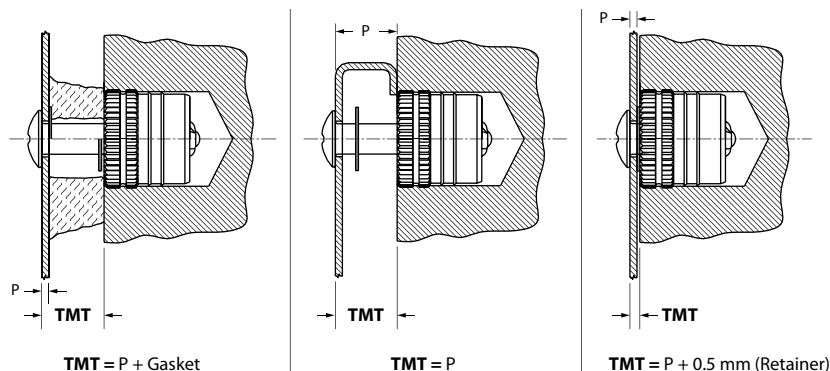


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
0.5 to 1.4 mm	11
1.5 to 2.4 mm	12
2.5 to 3.4 mm	13
3.5 to 4.4 mm	14
4.5 to 5.4 mm	15
5.5 to 6.4 mm	16
6.5 to 7.4 mm	17
7.5 to 8.4 mm	18
8.5 to 9.4 mm	19
9.5 to 10.4 mm	20
10.5 to 11.4 mm	21
11.5 to 12.4 mm	22
12.5 to 13.4 mm	23
13.5 to 14.4 mm	24
14.5 to 15.4 mm	25
15.5 to 16.4 mm	26
16.5 to 17.4 mm	27
17.5 to 18.4 mm	28
18.5 to 19.4 mm	29
19.5 to 20.4 mm	30
20.5 to 21.4 mm	31
21.5 to 22.4 mm	32
22.5 to 23.4 mm	33
23.5 to 24.4 mm	34
24.5 to 25.4 mm	35
25.5 to 26.4 mm	36
26.5 to 27.4 mm	37

## Example:

When TMT = 24 mm;

Stud Length Number is **34**;

Stud Part Number is **517-734-190** for a Phillips recess #2 stud.

## Note:

1. Equals (L) Dim on Stud Selection pages.

All dimensions on this page are in millimeters.



Additional installation information is located at the end of this section.



### Stud (Washer Head)



Phillips Recess #3



### Additional Stud Dimensions:

**L Dimension** - The stud length (L) depends on the type of receptacle chosen and the thickness of your materials. Use the table provided with each type of receptacle to determine the stud length needed for your application.


### Standard Material & Finish:

**Material:** Case hardened steel

**Finish:** Zinc plate and chromate

### Rapier Stud Part Numbers:

## D2-519-17(L)-190

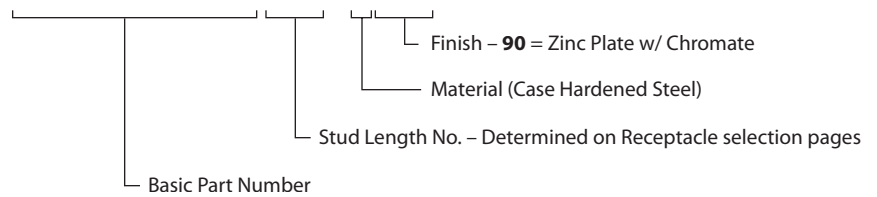

### Plastic Retainer




**Part Number**

D2-GP6B

### Standard Material:

**Material:** Black thermoplastic

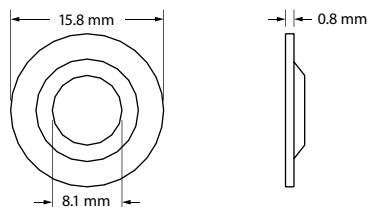

All dimensions on this page are in millimeters.


# DZUS® Rapier® D2 Quarter-Turn Receptacle Clip-On & Right Angle Bracket – 9 mm

**DZUS®**  
QUICK ACCESS



Clip-On

Support Thickness Ranges	Clip-On Part Numbers	H Dim.
0.7 to 3.2 mm	D2-339-300-190	10.7 mm
3.2 to 5.5 mm	D2-339-301-190	11.3 mm

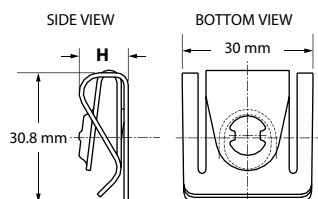


## Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate, chromate



Right Angle Bracket

Part Number	D2-339-310-190
-------------	----------------

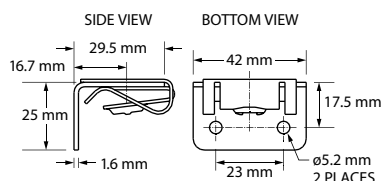

## Material & Finish - Bracket

**Material:** Steel  
**Finish:** Zinc plate, chromate

## Material & Finish - Receptacle

**Material:** Spring steel  
**Finish:** Zinc plate, chromate

## Mechanical

**Maximum Load without Distortion:** 61 lbs.

All dimensions on this page are in millimeters.

## To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

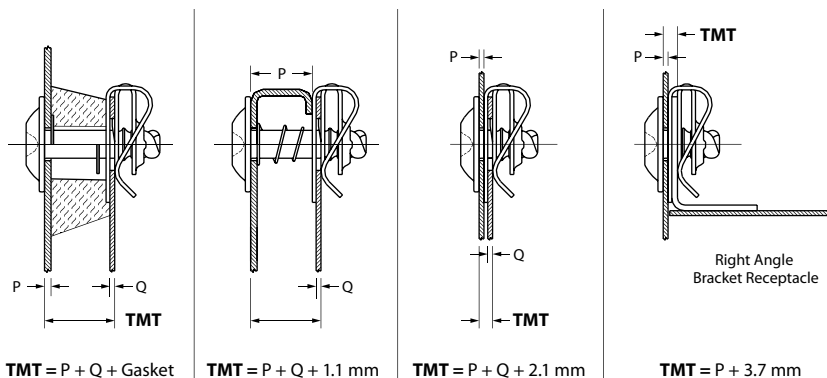


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.0 to 2.9 mm	10
3.0 to 3.9 mm	11
4.0 to 4.9 mm	12
5.0 to 5.9 mm	13
6.0 to 6.9 mm	14
7.0 to 7.9 mm	15
8.0 to 8.9 mm	16
9.0 to 9.9 mm	17
10.0 to 10.9 mm	18
11.0 to 11.9 mm	19
12.0 to 12.9 mm	20
13.0 to 13.9 mm	21
14.0 to 14.9 mm	22
15.0 to 15.9 mm	23
16.0 to 16.9 mm	24
17.0 to 17.9 mm	25
18.0 to 18.9 mm	26
19.0 to 19.9 mm	27
20.0 to 20.9 mm	28
21.0 to 21.9 mm	29
22.0 to 22.9 mm	30
23.0 to 23.9 mm	31
24.0 to 24.9 mm	32
25.0 to 25.9 mm	33
26.0 to 26.9 mm	34
27.0 to 27.9 mm	35
28.0 to 28.9 mm	36

### Note:

1. Equals (L) Dim on Stud Selection pages.

### Example:

When TMT = 24 mm;  
Stud Length Number is **32**;  
Stud Part Number is **D2-519-1732-190**.

Additional installation information is located at the end of this section.

# DZUS® Rapier® D2 Quarter-Turn Receptacle


## Front Load, Clip-In – 9 mm

**DZUS®**  
QUICK ACCESS




Front Load,  
Clip-In

**Part Number** D2-339-200-190

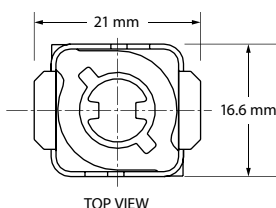

TOP VIEW

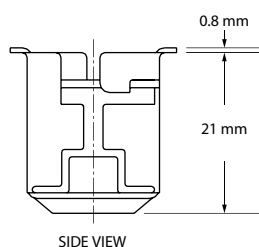

SIDE VIEW

### Material & Finish

**Material:** Spring steel

**Finish:** Zinc plate and chromate

### Mechanical

**Maximum Load Without Distortion:** 23 lbs.

### To Determine Stud Length Needed

1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

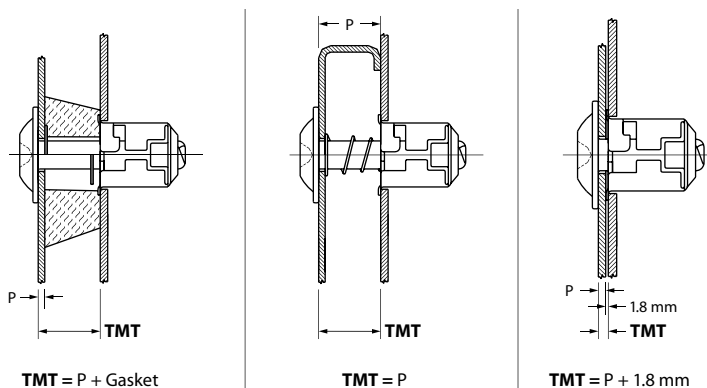


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.5 to 3.4 mm	22
3.5 to 4.4 mm	23
4.5 to 5.4 mm	24
5.5 to 6.4 mm	25
6.5 to 7.4 mm	26
7.5 to 8.4 mm	27
8.5 to 9.4 mm	28
9.5 to 10.4 mm	29
10.5 to 11.4 mm	30
11.5 to 12.4 mm	31
12.5 to 13.4 mm	32
13.5 to 14.4 mm	33
14.5 to 15.4 mm	34
15.5 to 16.4 mm	35
16.5 to 17.4 mm	36

### Example:

When TMT = 10 mm;  
Stud Length Number is **29**;  
Stud Part Number is **D2-519-1729-190**.

### Note:

1. Equals (L) Dim on Stud Selection pages.


All dimensions on this page are in millimeters.

Additional installation information is located at the end of this section.


DZUS® Rapier® D2 Quarter-Turn Receptacle  
Rivet Plate & Weld Plate – 9 mm



Rivet Plate

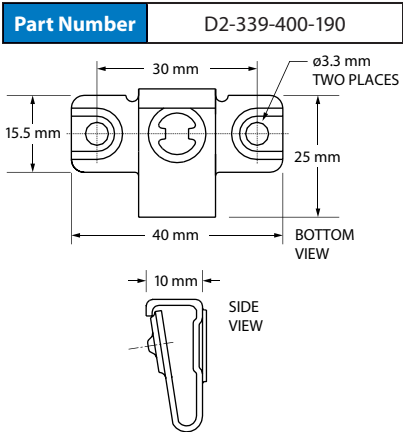

Weld Plate

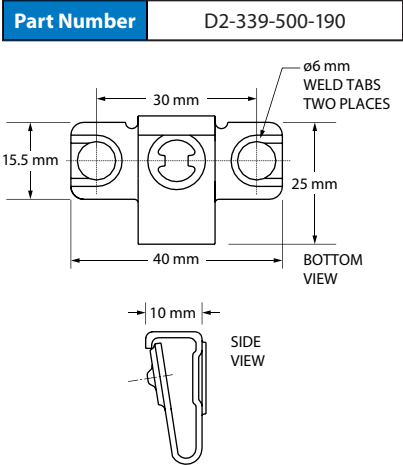

Material & Finish

**Material:** Spring steel  
**Finish:** Zinc plate and chromate

Mechanical

**Maximum Load without Distortion:** 65 lbs.

All dimensions on this page are in millimeters.

To Determine Stud Length Needed

- 1. Calculate the Total Material Thickness (TMT) using Figure 1 below.
- 2. Then, using the table, find the TMT Range that applies to your calculated TMT. Use the Stud Length Number to complete the Stud Part Number.

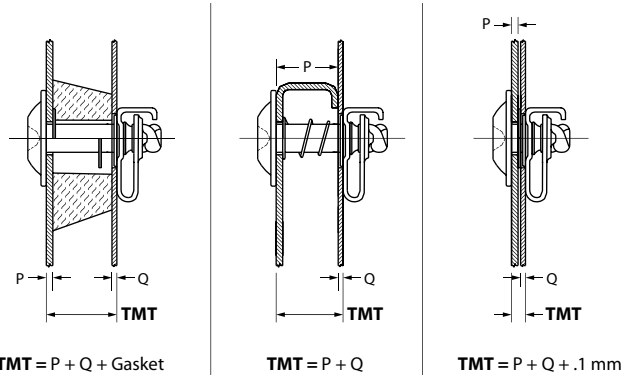


Figure 1: Total Material Thickness (TMT)

TMT	Stud Length No. (L Dim) <sup>1</sup>
2.0 to 2.9 mm	10
3.0 to 3.9 mm	11
4.0 to 4.9 mm	12
5.0 to 5.9 mm	13
6.0 to 6.9 mm	14
7.0 to 7.9 mm	15
8.0 to 8.9 mm	16
9.0 to 9.9 mm	17
10.0 to 10.9 mm	18
11.0 to 11.9 mm	19
12.0 to 12.9 mm	20
13.0 to 13.9 mm	21
14.0 to 14.9 mm	22
15.0 to 15.9 mm	23
16.0 to 16.9 mm	24
17.0 to 17.9 mm	25
18.0 to 18.9 mm	26
19.0 to 19.9 mm	27
20.0 to 20.9 mm	28
21.0 to 21.9 mm	29
22.0 to 22.9 mm	30
23.0 to 23.9 mm	31
24.0 to 24.9 mm	32
25.0 to 25.9 mm	33
26.0 to 26.9 mm	34
27.0 to 27.9 mm	35
28.0 to 28.9 mm	36

**Note:**  
1. Equals (L) Dim on Stud Selection pages.


**Example:**  
When TMT = 24 mm;  
Stud Length Number is **32**;  
Stud Part Number is **D2-519-1732-190**.

Additional installation information is located at the end of this section.

## Stud Panel Preparation


Standard Panel Hole	
Stud Size	Hole Diameter
3.5 mm	3.7 mm $\pm 0.1$
5 mm	5.1 mm $\pm 0.1$
7 mm	7.1 mm $\pm 0.1$
9 mm	9.4 mm $\pm 0.1$

## Support Panel Preparation for Clip-On Receptacles

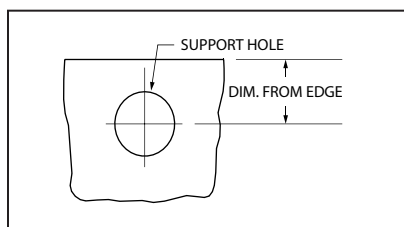

Receptacle Size	Support Range	Hole Diameter	Dim. From Edge
3.5 mini	0.5 to 1.8 mm	6.0 mm $+0.2$	4.5 mm $\pm 0.2$
5 mini	0.9 to 2.5 mm	8.5 mm $+0.2$	6.5 mm $-0.5$
5 long reach	0.9 to 2.5 mm	8.5 mm $+0.2$	11.0 mm $-0.2$
7 mini	0.9 to 2.5 mm	11.0 mm $+0.2$	8.0 mm $\pm 0.5$
7 long reach	0.7 to 3.2 mm	11.0 mm $+0.2$	11.0 mm $-0.5$
7 thick panel	3.2 to 5.5 mm	11.0 mm $+0.2$	11.0 mm $-0.5$
9 (2 models)	0.7 to 5.5 mm	14.0 mm $+0.2$	13.0 mm $-0.5$

## Support Panel Preparation for Snap-In

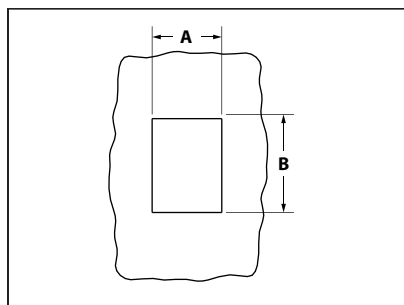


Receptacle Size	Support Range	Dimension A	Dimension B
5 (2 models)	0.9 to 2.0 mm	11 mm $+0.2$	15.5 mm $+0.2$
7 (2 models)	0.9 to 2.0 mm	13 mm $+0.2$	17.5 mm $+0.2$


## Support Panel Preparation for Press-In Inserts

Receptacle Size	Hole Diameter Soft Metal Press-Insertion	Hole Diameter Thermoplastic Press or Ultrasonic Insertion
5	12.0 to 12.1 mm	11.5 to 11.6 mm
7	15.0 to 15.1 mm	14.5 to 14.6 mm


## Support Panel Preparation for Rivet Plate Receptacle - 9mm

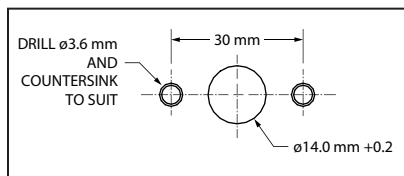

## Support Panel Preparation for Weld Plate Receptacle - 9mm

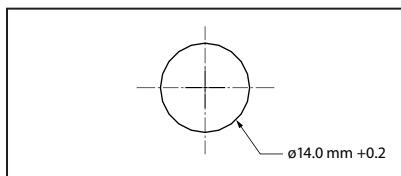


## Support Panel Preparation for Front Load Clip-In Receptacle - 9mm

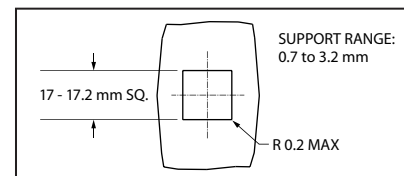


All dimensions on this page are in millimeters.

## Installation Procedure for Snap-In Receptacles

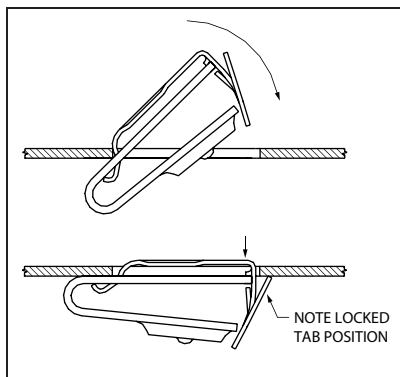

## Installation Procedure for Press-In Insert (5mm and 7mm only)

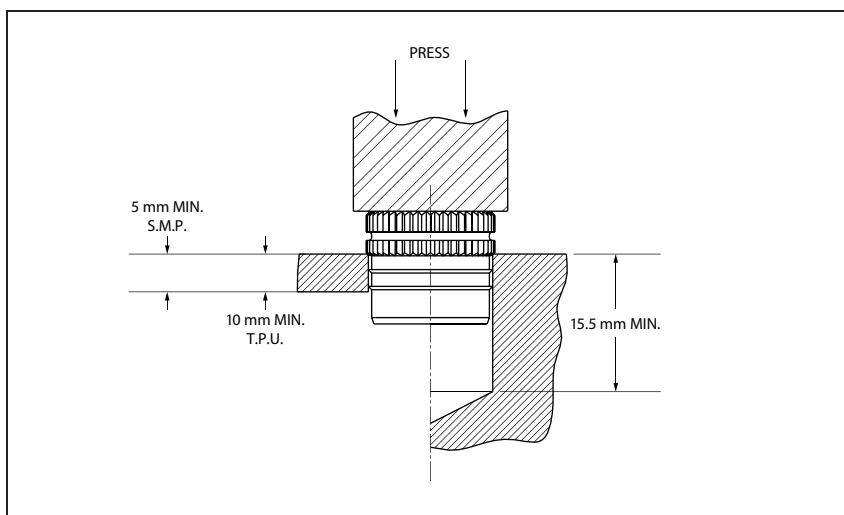


**Note:**

S.M.P. = Soft Metal Press-Insertion

T.P.U. = Thermoplastic Press or Ultrasonic Insertion

## Installation Procedure for Front Load, Clip-In Receptacles

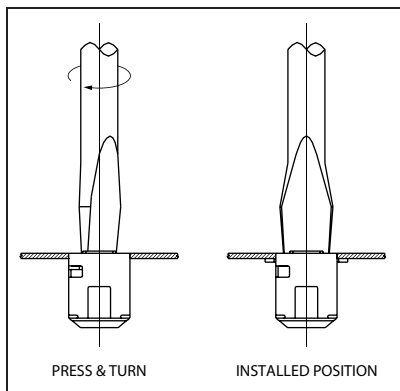

All dimensions on this page are in millimeters.