


Spring Plungers · with internal hexagon and seal EH 22060.



Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection. By means of the seal, liquid cannot penetrate into the spring plunger.

Material

Pin

- Free cutting steel, hardened, blackened
- Stainless steel 1.4305

Seal

- NBR

Body

- Free cutting steel, blackened
- Stainless steel 1.4305

Spring

- stainless steel

Assembly

Spring plungers can be mounted and removed by means of the slot or internal hexagon. Please use a special assembly tool for mounting with a slot (pin side).

Characteristic

Standard spring load: no marking

Reinforced spring load: marked with two lines



Standard spring load



Heavy spring load

More information

Notes

Special types on request.

Spring plungers are specially tested for spring range and forces.

References


Compared to EH 22060., i.e. "no seal", there are deviations in dimension l, spring load and temperature range.

Thread lock on request, please refer to appendix - Technical Data -

Further products

- Spring Plungers, with internal hexagon

Drawing

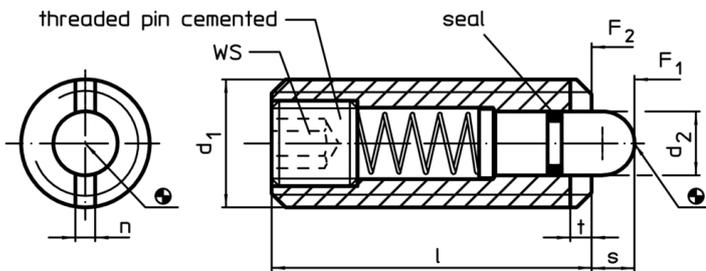

Order information


	Dimensions					WS	Stroke s	Spring load ¹⁾		Temperature		Weight	Art. No.
	d ₁	d ₂	l	n	t			F ₁	F ₂	min.	max.		
	[mm]					[mm]	[mm]	[N]		[°C]	[g]		
free cutting steel, standard spring load													
M 8	3.8	26	1.5	1.4	2.5	3.0	9	24	-30	80	6.7	22060.0048	
M10	4.0	28	1.5	1.4	3.0	3.5	15	30	-30	80	12.0	22060.0050	
M12	6.0	35	2.7	2.0	4.0	4.0	24	50	-30	80	20.0	22060.0052	
M16	7.5	40	3.2	2.5	5.0	5.0	36	58	-30	80	43.0	22060.0056	

¹⁾ statistical average value

d ₁	Dimensions				WS	Stroke s	Spring load ¹⁾		min. max.		[g]	Art. No.
	d ₂	l	n	t			F ₁ ~	F ₂ ~	[°C]			
[mm]												
free cutting steel, heavy spring load												
M 8	3.8	26	1.5	1.4	2.5	3.0	17	39	-30	80	6.7	22060.0148
M10	4.0	28	1.5	1.4	3.0	3.5	22	43	-30	80	12.0	22060.0150
M12	6.0	35	2.7	2.0	4.0	4.0	40	80	-30	80	20.0	22060.0152
M16	7.5	40	3.2	2.5	5.0	5.0	44	113	-30	80	44.0	22060.0156
stainless steel, standard spring load												
M 8	3.8	26	1.5	1.4	2.5	3.0	9	24	-30	80	6.8	22060.0448
M10	4.0	28	1.5	1.4	3.0	3.5	15	30	-30	80	12.0	22060.0450
M12	6.0	35	2.7	2.0	4.0	4.0	24	50	-30	80	20.0	22060.0452
M16	7.5	40	3.2	2.5	5.0	5.0	36	58	-30	80	43.0	22060.0456

¹⁾ statistical average value

Accessories

	Dimensions				[g]	Art. No.
	d ₁	b	d	l		
[mm]						
Assembly Tool for mounting via slot (pin sided)						
	M 8	60	6.45	70	39	22060.0908
	M10	80	8.00	80	66	22060.0910
	M12	80	9.80	80	72	22060.0912
	M16	100	13.50	105	144	22060.0916

Application example

