

**IS275063-68-S1**  
VECTOR T1 HANDLE

**DESCRIPTION**

Flush T-handle with a 4 mm compression stroke. Bolts are moulded into the dish for mounting with nuts on the inside. The Vector T-handle features two independent locking systems: key-locking cylinder with a concealed locking pin that inserts into the handle and a retractable padlock loop (Ø 8 mm). Both of these prevent the handle from being lifted or turned.

The handle is supplied with cylinder dust-cover. Protection degree IP65.

The handle is supplied with a 3 point adjustable cam. Handle rotation 180°.




FRONT

**MATERIAL**

- Adjustable cam:** Zinc die cast, passivated
- Body:** Glass fibre reinforced polyamide (PA6GF30)
- Cast-in bolts:** Steel, zinc plated
- Cylinder:** Zinc die cast, stainless steel 304 cap and dust shutter
- Handle:** Zinc die cast, black texture powder coated
- Fixed cam:** Steel, zinc plated
- Padlock loop:** Stainless steel 304
- Roller:** Glass fibre reinforced polyamide (PA6GF30)
- Shaft:** Steel, zinc plated

**TECHNICAL INFORMATION**

- Key extraction:** Open / Closed
- Cylinder information:** Supplied with two keys
- Notes:** Maximum tightening torque 2.2 Nm.
- Standards:** IP65  
DIN EN 61373

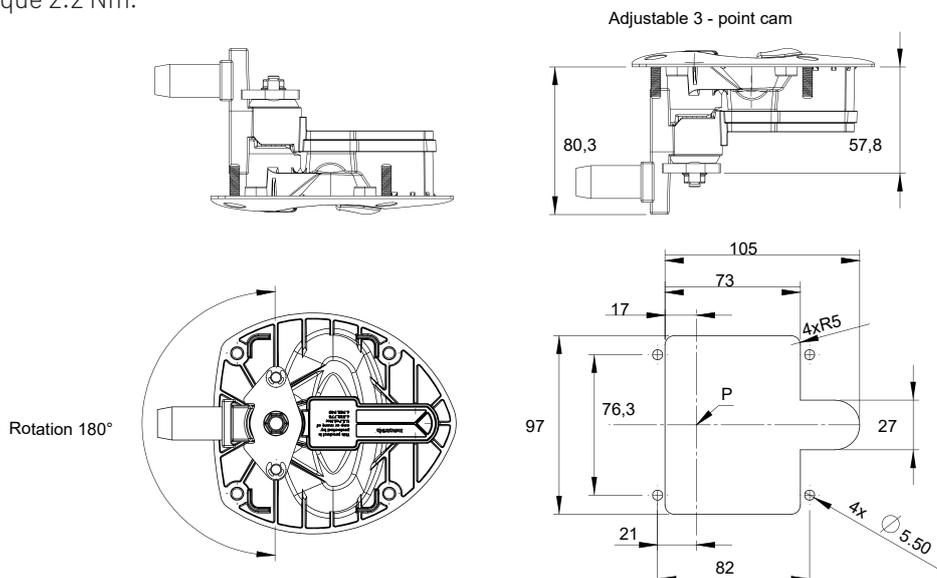

**272321 - 06 - S**  
VECTOR T1 HANDLE

**DESCRIPTION**

This flush T-handle with 180° rotation has a 4mm compression stroke. It features two locking systems: a key-locked cylinder and a retractable padlock loop that prevents the handle from being lifted.

The handle is supplied with a 3 point adjustable cam.

The handle fixing is mounted with rivets. To improve sealing against door, add the optional handle-shaped flat gasket.

Part# 275020-36.



**MATERIAL**

**Cylinder:** Zinc die cast, stainless steel 304 cap and dust shutter

**Adjustable cam:** Zinc die cast, passivated

**Body:** Glass fibre reinforced polyamide (PA6GF30)



**Fixed cam:** Steel, zinc plated

**Handle:** Zinc die cast, chrome plated

**Padlock loops:** Stainless steel 304

**Roller:** Glass fibre reinforced polyamide (PA6GF30)



**Shaft:** Steel, zinc plated.

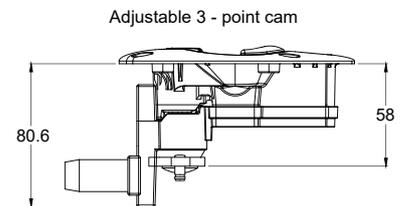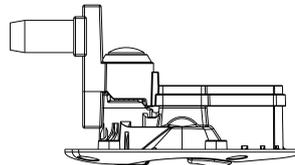

**TECHNICAL INFORMATION**

**Standards:** DIN EN 61373

**Cylinder information:** Supplied with two keys

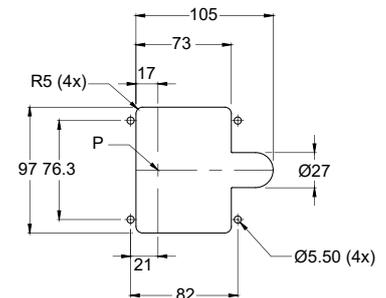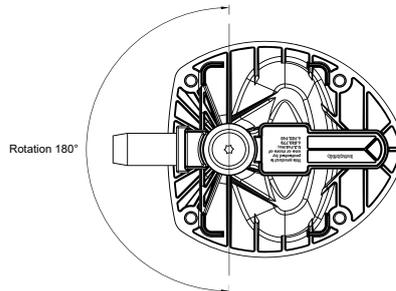


**275020-36**  
FLAT GASKET

**DESCRIPTION**

Flat gasket designed to be used with Vector T1 Handle.

Flat gasket 3mm supplied in NBR.

NBR is typically used where good oil resistance is important.

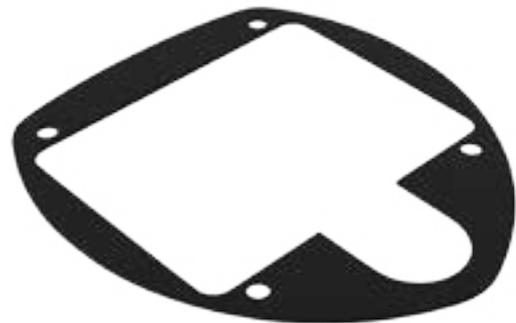

**McNaughtans**  
Administration & Melbourne Branch

321 Greens Rd, Keysborough, VIC 3173  
Mon - Fri : 8 AM - 4:30 PM  
03 8768 6666  
vicsales@mcnaughtans.com.au

**McNaughtans**  
Brisbane

925 Nudgee Road, Banyo, Qld 4014  
Mon - Fri : 8 AM - 4:30 PM  
07 32677722  
qldsales@mcnaughtans.com.au

**McNaughtans**  
Sydney

2/314 Hoxton Park Road, Prestons, NSW 2170  
Mon - Fri : 8 AM - 4:30 PM  
02 9609 5122  
nsw@mcnaughtans.com.au

**McNaughtans**  
Perth

3 Kalli Street, Malaga, WA 6090  
Mon - Fri : 8 AM - 4:30 PM  
08 9248 1833  
wainfo@mcnaughtans.com.au

**Struts Australia**  
Laverton

3/110 Fitzgerald Road, Laverton North, VIC 3026  
Mon - Fri : 8 AM - 4:30 PM  
03 9369 8113  
info@strutsaustralia.com

**Concept Latch, Lock and Hinge**  
Ascot Vale

Showroom : Ascot Vale  
Shop 2/93-95 Union Road, Ascot Vale, VIC 3032  
Mon-Friday: 8 AM-4:30 PM  
Warehouse : 321 Greens Road, Keysborough, VIC 3173  
03 9388 2551, sales@conceptlatch.com.au